AUDIO/VIDEO

Projectors & Displays
Mounts & Racks
A/V Receivers
HDMI/System Components & Distribution
iPod Docks
Remotes & IR Systems
Speakers
Whole House Audio Distribution/Connectors & Adapters
Commercial Sound

AUDIO/VIDEO LINE CARD

RESIDENTIAL A/V

(E5) Allegra
(2G) APC AV
(9N) Arlington
(XN) Aton
(UI) AudioSource
(Z5) Audiovox Accessories
(2Q) BenQ
(BD) Bose
(7C) CE Labs
(O3) Channel Vision
(CJ) Chief
(OB) Cinema Select
(DF) Draper
(E6) Emphasys
(GM) Gefen
(GO) Gold Line
(7I) Honeywell Interconnects
(IC) Incospec
(DN) iPort
(3J) JVC Co. of America
(KD) KEF
(5K) Key Digital
(KQ) Klipsch
(H4) Legrand
(2H) Leviton
(LV) Leviton
(CS) Linear
(MU) Linear
(NO) Middle Atlantic
(ZK) MTX / Mitek Corporation
(5M) MuxLab
(NP) New Wave Audio
(NN) Niles (Regionally)
(NK) NuVo
(OE) OEM Systems
(OW) OWI
(30) OmniMount
(OC) Onkyo
(ZG) Panamax
(QP) Peerless Industries
(UB) Pro Control
(C1) Proficient Audio
(9W) Repair Master (Warantech)
(RD) Russound
(NS) Sanus Systems
(1S) Sharp Professional
(T7) Sony Electronics
(9E) Spectrum Electronic Sol.
(R5) SR Components
(L5) TEAC
(HT) TIC Industries
(UT) Universal Remote Control (UPC)
(ZX) Vanco
(V8) VMP (Video Mount Products)
(OE) W Box Technologies
(WJ) Winegard
(VO) Xantech
(YM) Yamaha

COMMERCIAL A/V

(A4) AKG
(5A) Antex
(9N) Arlington
(3A) Astatic Microphones
(AT) Atlas Sound
(U1) Audio Design Association
(BO) Bogen Communications
(UF) Bosch Audio
(BD) Bose
(CJ) Chief
(QP) Ciil
(5C) Crown Audio
(9D) DBX Professional
(EJ) Electroline
(UV) ElectroVoice
(GM) Gefen
(GO) Gold Line
(HP) Hitachi Professional
(JF) JBL Professional
(4J) JVC Professional
(KR) Kenwood
(5K) Key Digital
(ND) Nady
(NK) NuVo
(3O) OmniMount
(ZG) Panamax
(PS) Paso
(QP) Peerless Industries
(OO) Pico
(XV) Posh
(PO) Pro Co Sound
(QB) QSC Audio
(QM) Quam Nichols Co.
(RL) Radio Design Labs
(RU) Russound
(TX) Samson Technologies
(SC) Sharp Professional
(SB) Shure Brothers
(CB) Soundcraft
(SO) Speco Technologies
(Y5) TASCAM
(UD) Telex
(UT) Universal Remote Control (URC)
(ZX) Vanco
(V8) VMP (Video Mount Products)
(X4) Viewsonic
(OE) W Box Technologies
(WS) Williams Sound Corp.

ADI
1.800.233.6261
adiglobal.com/us

New Vendor

* As of July 2014

YOUR BUSINESS DESERVES MORE

ADI

Your educational resource for AV

In an industry that changes swiftly, training is essential to effective installations and to keep ahead of competitors. ADI is dedicated to providing a trained, certified and expert team to give you up-to-the-minute, strategic solutions that support the success of your AV projects. Whether it's training a new employee, obtaining manufacturer certifications or achieving industry certification across your organization, ADI is your AV partner.

ADI Residential & Commercial AV Learning Opportunities for Integrators

- ADI Expos – More than twenty five AV certified Expo seminars
- An average of two AV training classes per event
- Manufacturer certification classes
- Monthly AV webinars – manufacturer and vendor, and industry related
- AV books and resources
- Branch Residential & Commercial training events
- Industry partnerships – ESX, BICSI, Infocomm, CEDIA, NCSA
- Customized manufacturer training events by request

ADI is Your Partner for Audio Video Solutions

For orders, call **1.800.233.6261** ▸ For Systems Sales & Support, call **1.800.234.7971** ▸ Visit us on the web @ **www.adiglobal.com/us**

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for

6 Zone House-Wide Audio System Using Volume Controls

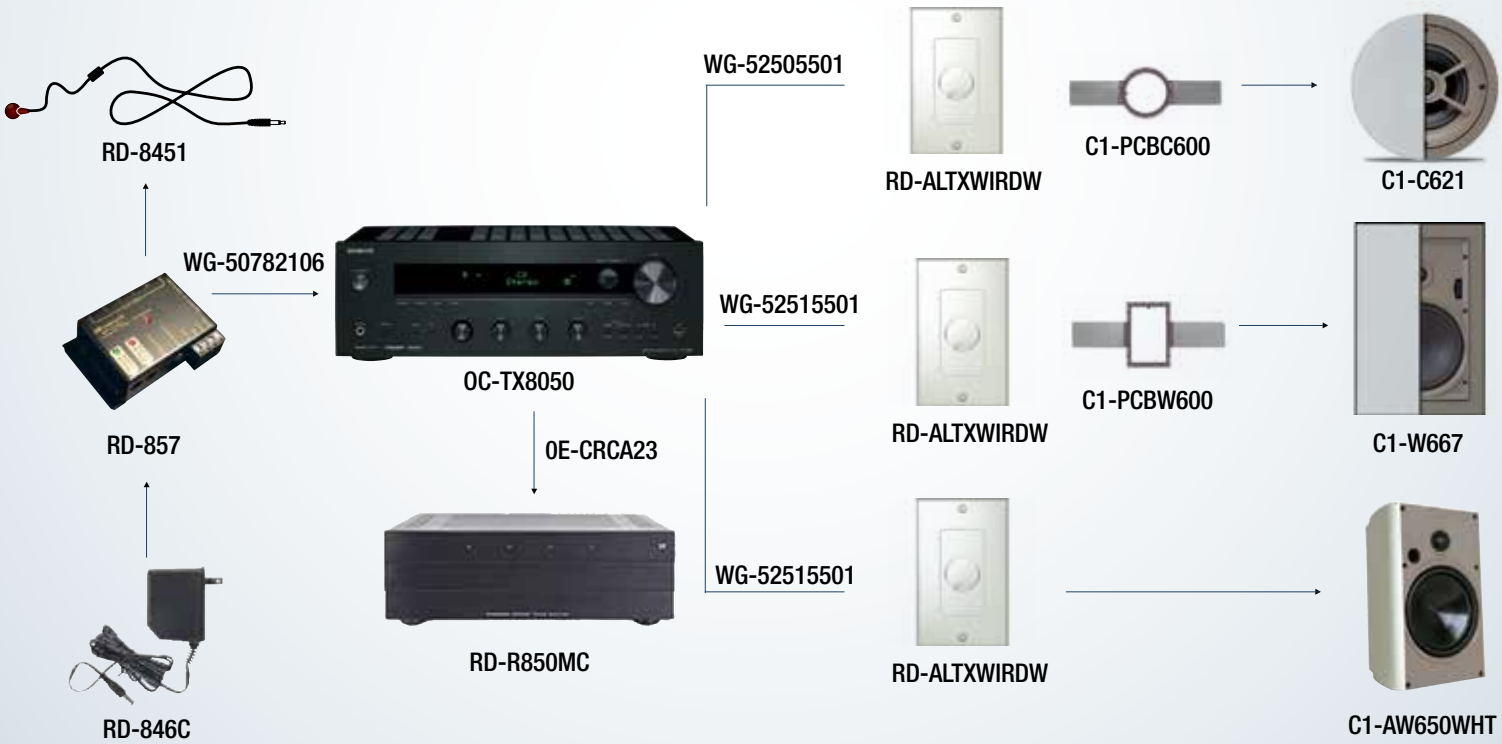

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **Onkyo** OC-TX8050
  Network Stereo Receiver
- ☐ **W Box Technologies** 0E-CRCA23
  3 ft. M-M Stereo RCA Cables
- ☐ **Russound** RD-R850MC
  4-Zone, 8-Channel Power Amp 50W/Channel
- ☐ **Russound** RD-ALTXWIRDW
  126W Single-Gang Rotary Volume Ctrl (6x)
- ☐ **Russound** RD-857
  Connector/Interface Unit for IR Receivers
- ☐ **Russound** RD-846C
  110VAC Power Supply
- ☐ **Russound** RD-8451
  Individual Component IR Emitter (4x)
- ☐ **Proficient** C1-C621
  6.5" 100 Watt Ceiling Speaker Pair (3x)
- ☐ **Proficient** C1-PCBC600
  Ceiling Speaker Bracket Pair (optional)
- ☐ **Proficient** C1-W667
  6.5" 75 Watt In-Wall Speaker Pair (2x)
- ☐ **Proficient** C1-PCBW600
  In-Wall Speaker Bracket Pair (optional)
- ☐ **Proficient** C1-AW650WT
  6.5" 150 Watt Indoor/Outdoor Speaker Pair
- ☐ **Honeywell** WG-52515501
  16/4 Stranded Home Theatre Sound Wire
- ☐ **Honeywell** WG-52505501
  16/2 Stranded Home Theatre Sound Wire
- ☐ **Honeywell** WG-50782106
  24/4 C5E Wire
- ☐ **Data Comm Electronics** 5F-450001WH
  1-Gang Recessed Low-Voltage Cable Plate

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for

6 Zone House-Wide Audio System Using Speaker-Level Audio Routing

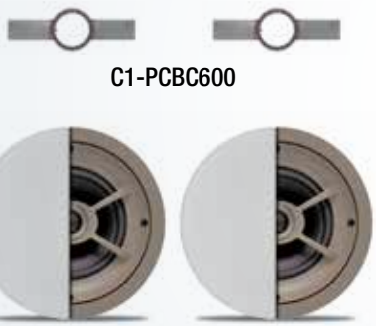

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **Onkyo** OC-TX8050
  2 Channel, 80 Watt Network Stereo Receiver
- ☐ **Aton** XN-DLA6
  6 Room Speaker Selector with Remote
- ☐ **Aton** XN-DLA6RKT
  RF Remote/Receiver Kit
- ☐ **Aton** XN-DLA6RM
  Audio Router Remote Control (5x)
- ☐ **Proficient** C1-C621
  6" Ceiling Speaker Pair (3x)
- ☐ **Proficient** C1-PCBC600
  Ceiling Speaker Bracket Pair (optional)
- ☐ **Proficient** C1-W667
  6.5" 75 Watt In-Wall Speaker Pair (2x)
- ☐ **Proficient** C1-PCBW600
  In-Wall Speaker Bracket Pair (optional)
- ☐ **Proficient** C1-AW650WT
  6.5" 150 Watt Indoor/Outdoor Speaker Pair
- ☐ **Honeywell** WG-52505501
  16/ 2 Stranded Home Theater Sound Wire

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for

Family/Living Room Theater

C1-C651

T7-KDL55W802

5K-HDRJ30X

UT-MRF350

UT-MX980

WG-54735501

T7-STRDN1050

C1-PS10

R5-VC12BKG

5K-HDRJ3

T7-BDPS5200

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **Sony** T7-KDL55W802
  55" 120HZ 1080P LED TV Black
- ☐ **Sony** T7-BDPS5200
  Blu-ray Disc Player 3D Wi-Fi
- ☐ **Sony** T7-STRDN1050
  AV Receiver 150W 7.2CH 4K UPSC
- ☐ **W Box Technologies** 0E-CA63T
  37-63" Tilt Mount Black
- ☐ **Proficient** C1-C651
  6.5" 100W LCR Ceiling Speaker Each (5x)
- ☐ **Proficient** C1-PS10
  120 Watt Subwoofer
- ☐ **Universal Remote** UT-MX980
  Programmable IR/RF Remote Control
- ☐ **Universal Remote** UT-MRF350
  Base Station for Remote Control
- ☐ **Key Digital Systems** 5K-HDRJ30X
  Black Bull 30 Foot HDMI Male to Male Cable
- ☐ **Key Digital Systems** 5K-HDRJ3
  Black Bull 3 Foot HDMI Male to Male Cable (2x)
- ☐ **SR Components** R5-VC612BKG
  RCA Male-Male RG59 Gold 12'
- ☐ **Honeywell** WG-54735501
  16/2 Stranded Audio Wire

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for

Dedicated Home Theater

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **JVC Professional** 4J-DLARS57U
  Ref Series D-ILA Home Projector
- ☐ **Peerless Industries** QP-PRGUNVA
  Projector Wall Mount Bracket
- ☐ **Draper** DF-253217
  Onyx 106" Diag M1300 Fabric
- ☐ **Yamaha** YM-RXA840BL
  Aventage 7.2CH AV Receiver
- ☐ **Kef** KD-T305
  Two and a half-way closed box speakers. Closed box powered subwoofer.
- ☐ **Universal Remote** UT-MX890
  Programmable Color LCD Remote
- ☐ **Universal Remote** UT-MRF350
  Base Station for Remote Control
- ☐ **Yamaha** YM-BDS473BL
  Blu-Ray Disc Player
- ☐ **Key Digital** 5K-HDRJ50X
  50 Foot HDMI Male to Male Cable
- ☐ **Key Digital** 5K-HDRJ3
  3 Foot HDMI Male to Male Cable (2x)
- ☐ **SR Components** R5-VC625BKG
  RCA Male-Male RG59 Gold 12'
- ☐ **Honeywell** WG-54755501
  14/2 105 Stranded Audio Wire
- ☐ **Omnimount** 3O-RE27
  Enclosed Rack System Cabinet
- ☐ **Panamax** ZG-M4315PRO
  Power Management w/ Control System
- ☐ **Panamax** ZG-MD2
  2 Outlet Direct Plug In Surge

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for

6 Zone House-Wide Audio System with Control/Touchscreen and Streaming

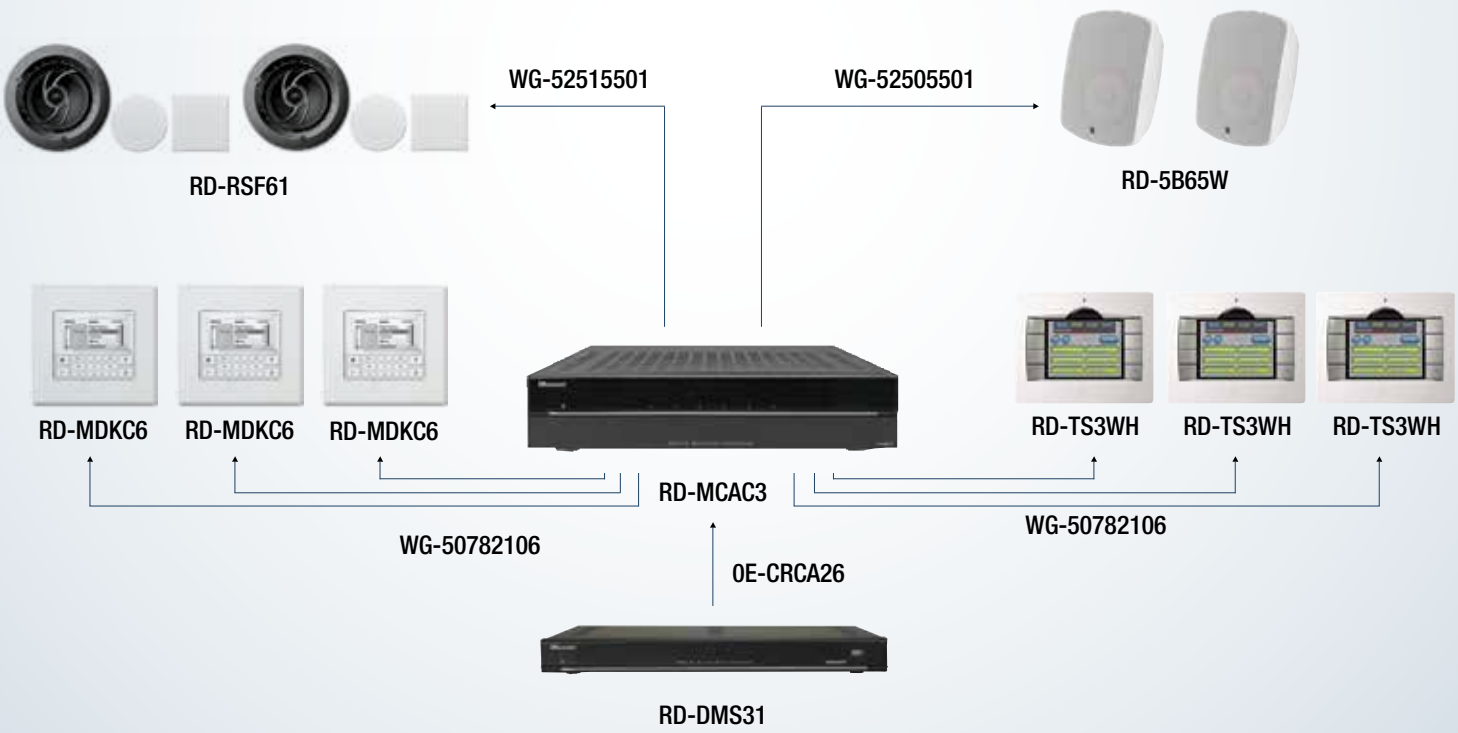

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- **Russound** RD-MCAC3
  6 Zone Controller Amplifier
- **Russound** RD-MDKC6
  Multiline Display Keypad (3x)
- **Russound** RD-TS3WH
  3.6" C-Series Touchscreen White (3x)
- **Russound** RD-DMS31
  Multi-Room Digital Media Streamer
- **Russound** RD-RSF61
  6.5" 80 Watt Ceiling Speaker Pair (5x)
- **Russound** RD-SBC67
  Acclaim 5 Series In-Ceiling Speaker (5x)
- **Russound** RD-RSGS
  Square Speaker Grill (optional)
- **Russound** RD-5B65W
  6.5" Outdoor Speaker Pair
- **ICC** H2-PCSC03BL
  Cat5e 3 ft. Patch Cable Male/Male (2x)
- **W Box Technologies** 0E-CRCA26
  6 ft. M-M Stereo RCA Cable
- **Honeywell** WG-52515501
  16/4 Stranded Home Theatre Sound Wire
- **Honeywell** WG-52505501
  16/2 Stranded Home Theatre Sound Wire
- **Honeywell** WG-50782106
  24/4 C5E Wire
- **Data Comm Electronics** 5F-450001WH
  1-Gang Recessed Low-Voltage Cable Plate

ADI IS YOUR DESTINATION FOR RESIDENTIAL & COMMERCIAL A/V PRODUCTS!

ADI PRICE ASSURANCE
We will meet any distributor's current promotional pricing!*

24/7 Pickup Convenience

NEW! BOSE Better sound through research. Gefen Klipsch NUVO Whole Home Audio PANAMAX YAMAHA

BEST Brands in Residential & Commercial Audio/Video!

Aiphone • AKG • Allegra • APC • Atlas Sound • ATON • AudioSource BenQ • Bogen • Bosch • Bose • CE Labs • Channel Vision Chief • Ciil • Comelit • Crown • DBX • Draper • Emphasys Gefen • Hitachi Pro • Honeywell • iPort • JBL Pro • JVC Pro KEF • Key Digital • Klipsch • Legrand • Linear • Middle Atlantic MuxLab • Nady Systems • Niles • Nutone • OmniMount • NuVo Onkyo • Panamax • Panasonic • Paso Sound • Peerless-AV • Pico Digital Planar • Posh • Pro Control • Proficient • Quam • QSC • RCA RDL • Russound • Sanus • Sharp • Sharp Pro • Shure • Sony • Speco Talkaphone • TASCAM • TEAC • Tripplite • URC • Vanco • ViewSonic VMP • W Box Technologies • Xantech • Yamaha - ***and More!***

100 Fully Stocked Branches Across North America

System Design Support Available

CALL NOW! **1.800.233.6261**

www.adiglobal.com/us

ADI
YOUR BUSINESS DESERVES MORE

intrusion | fire | video surveillance | access | power | audio/video | networking | telephony | central vac | tools & hardware | wire & cable

*The item must be of the same brand, model and quantity and located in the United States and is subject to verification. The comparable item must be new and factory sealed and subject to a manufacturer's warranty applicable in the United States. Competitors' prices must be in US dollars and will be adjusted for any fees, taxes or other charges such as environmental handling fees and shipping. The offer does not apply to advertising errors or misprints, restricted or dealer program offers, rebates, coupons, premiums, free or bonus offers, clear-out pricing, limited or minimum quantity or limited time offers, add-on related services such as extended service plans, delivery, installation, maintenance agreements, special credit or financing offers. We reserve the right to exclude significantly below cost competition loss leader pricing. The terms and conditions of the offer are subject to change without notice.

YOUR BUSINESS DESERVES MORE

ADI Sample systems for digital signage

Whether you need digital signage for a retail point of sale application or to communicate information to multiple displays around a building, campus or through a network, ADI has the products and support to help you deliver the best solution.

Typical Digital Signage System

1S-PNE602
60" Sharp Commercial Display Panel

7C- MP700
CE Labs Networkable Digital Media Player

QP-ST660PA
Tilting Wall Mount for Display

5K-HDRJ3
3' HDMI Cable

Self Contained

All-In-One
Signage Solution

X4-4646
46" ViewSonic E-Poster

HITACHI
Inspire the Next

Breakthrough Performance with Incredible Picture Quality

- XGA 1024 x 768 resolution
- 3,000 ANSI lumens light output
- 2500:1 contrast ratio
- 4.500 hours lamp life (Standard mode)
- 6,000 hours lamp life (Eco mode)
- ImageCare technology
- BrilliantColor™
- Deeper black levels
- Wall color correction
- Filter free design

HP-CPDX300 (CP-DX300)

HITACHI
Inspire the Next

Cost Effective Wide Screen Projector

- 3000 Lumen WXGA projector
- WXGA 1280 x 800 resolution
- 3,000 ANSI lumens white/color output
- 2000:1 contrast ratio
- HDMI 1 input
- 16W audio output
- 4,000 hours lamp life (Standard mode) and 6,000 hours lamp life (Eco mode)
- RJ-45 port for Network Control

HP-CPEW300N (CP-EW300N)

JVC
PROFESSIONAL

Reference Series 3D Home Cinema Projector

- The DLA-RS45 is a perfect entry into industry leading home theater performance. With a native contrast ratio of 50,000:1 and a host of new features for 2012, renowned D-ILA image quality is now available to a much wider range of enthusiasts.

4J-DLARS46U

ViewSonic®

19" LED Widescreen LCD

- 19" (18.5" viewable) LED Widescren LCD
- 1366x768
- 100,000,000 :1 Dynamic Contrast Ratio
- Up to 40% energy saving with LED backlight

X4-VA1938WAL (VA1938wa-LED)

save more at ADI

Expanded Monthly Sales Flyer Offers 16 Pages of Savings…

- Special 2-week deals
- Thousands of items in stock everyday
- Hundreds of brand names
- Next day delivery
- 24/7 pickup anytime convenience
- Online shopping

...And Much More!

ADI PRICE ASSURANCE
We will meet any distributor's current promotional pricing*
*subject to proof of competitor's offering

ADI
YOUR BUSINESS DESERVES MORE

more products » more locations » more savings » more support

For orders, call 1.800.233.6261 ▸ For Systems Sales & Support, call ▸ 1.800.234.7971 ▸ On-line catalog @ adiglobal.com/us

Arlington

TV Bridge™ II Kit

- Fully pre-assembled recessed boxes with pre-wired receptacle, device cord and connector SAVES TIME!
- Extra secure installation of flat screen TV; additional components
- Plugs and connectors stay inside recessed boxes – TV mounts flush to the wall

9N-TVB712BK (TVB712BK)

9N-TVBRA2K (TVBRA2K)

9N-TVBRA1K (TVBRA1K)

9N-TVBRA3K (TVBRA3K)

MEA approved ETL UL

Low Voltage & Power Multi-Gang TV Box™

- Recessed plastic box with angled power & multiple low-voltage openings for data/media connections
- Positions plugs behind wall surface to allow the use of close-clearance mounting hardware
- Interchangeable tray holds digital converter
- cULus listed

9N-TVB713 (TVB713)

c UL us

Steel TV Box™ for Use with Metal Raceways

- 2-, 3- & 4-gang recessed combo box, paintable white trim plate
- Flat screen TVs mount flush in new work or retrofit, plugs & connectors stay inside recessed box
- Combination power/low voltage for low-voltage connections

9N-TVBS505 (TVBS505)

9N-TVBS507 (TVBS507)

9N-TVBS613 (TVBS613)

c UL us

Low Profile TV BOX™ for New or Retrofit

- New work or retrofit installs on 1/2" or 5/8" drywall with wall cavity depths as shallow as 3/4"
- Apps include furring strips on concrete block walls & 2x2, 2x3, 2x4 or larger studs
- Helpful when plumbing or obstructions inside wall
- Roomy box holds multiple cables & brackets for tying off

9N-TVL508 (TVL508)

c UL us

8 x 10 TV BOX™ for New and Retrofit Installations

- More space and installs horizontally or vertically for multiple low-voltage connections behind the TV
- Brackets inside for neater cables 1-1/2" knockout for ENT and other low voltage wiring
- Mounting wing screws secure box to wall
- Supplied with cover blank, wall plates, SCOOP™ cable connectors for unused openings

9N-TVBU810 (TVBU810)

c UL us

Two-Gang Combination TV Box for Power & Low Voltage

- Recessed, 2-gang plastic TV Box for new work or retrofit, fits walls up to 1-1/2" thick
- Combo box offers power and low voltage for Class 2 wiring

9N-TVBU505 (TVBU505)

GET IT NOW!

LOAD-A-RACK150 Installation Tool

- The LAR150 works with any full rack width equipment and easily latches to the front rails of the rack being loaded, providing perfect horizontal and screw hole alignment. The LAR150 can support gear weighing up to 150 pounds and allows a single installer to install heavy product by themselves.

AT-LAR150 (LAR150)

12RU Half Width Rack

- Wall mount designed specifically to accommodate half rack width components. 16 gauge CRS construction
- Finished in black electrostatic powder coat
- Tilt forward design allows for easy install and access

AT-WMA1219HR (WMA12-19-HR)

Enclosed Half-Rack System

- 18-space half-rack supports up to 500 lbs. (226.8 kg)
- Fully enclosed cooling system with top and bottom ventilation

3O-RE18 (1004777)

Enclosed Rack System

- 27-space rack supports up to 750 lbs. (340.2 kg)
- Fully enclosed cooling system with top and bottom ventilation
- Adjustable feet level rack

3O-RE27 (1004778)

Enclosed Rack System

- 42-space rack supports up to 1,100 lbs. (500 kg)
- Fully enclosed cooling system with top and bottom ventilation
- Works with all standard 19" rack accessories
- Ships assembled with shelves and blanks

3O-RE42

Universal Projector Ceiling Mount

- Built-in pitch/roll adjustment; Hex-pin anti-theft security feature
- Universal mounting pattern fits projectors with any hole pattern

3O-PROPJTB (1003178)

OMNI MOUNT®

PLAY40DS/PLAY40

- Fits TV's 30"-55" (Capacity 18-40lbs)
- 20" of movement in all directions
- VESA Compliant: 200x100 to 600x400

3O-PLAY40DS (PLAY40DS)

3O-PLAY40 (PLAY40)

PLAY70DS/PLAY70

- Fits TV's 30"-60" (Capacity 35-70lbs)
- Extends 28" from the wall and retracts to 6.5"
- VESA Compliant: 200x100 to 600x400

3O-PLAY70DS (PLAYDS)

3O-PLAY70 (PLAY70)

PLAY25/PLAY25X

- Fits TV's 19"-32" (Capacity 7-25lbs)
- PLAY25X Extends 33.5" from the wall and retracts to 4.4"
- VESA Compliant: 100x100 to 200x200

3O-PLAY25X (PLAY25X)

3O-PLAY25 (PLAY25)

LIFT70

- Same dimensions as LIFT50 as shown
- Fits TV's 46"-65" (Capacity 45-70lbs)
- Low Profile, Tilt mount with 16" of vertical travel
- VESA Compliant: 200x200 to 400x400

3O-LIFT70 (LIFT70)

LIFT50

- Fits TV's 40"-50" (Capacity 3O-50lbs)
- Low Profile, Tilt mount with 16" of vertical travel
- VESA Compliant: 200x200 to 400x400

3O-LIFT50 (LIFT50)

OMH (EZ Mount)

- Fits most 32"-60" TV's and supports up to 80lbs
- Mounting profile is very low only 1.3"
- VESA compliant: Universal fits VESA patterns 200mm to 600mm wide

3O-OMH (OMH)

TRIA/TRIA1

- Tempered Glass Shelves support up to 30lbs
- Adjustable height in 1" increments
- Integrated cable management hides wires
- Can be used with or without TV

3O-TRIA1 (TRIA1)

3O-TRIA (TRIA)

Multipurpose Screen Cleaner

- Multipurpose screen cleaner for any viewing surface
- Safely removes dirt, dust and fingerprints
- Alcohol- and ammonia-free non-drip formula

3O-OESC2 (OESC2)

Precision Gear Projector Mount

- Two adjustment knobs control projector image alignment
- Cable management allows cables to be routed through projector mount out of sight

QP-PRGUNVA (PRG-UNV)

Universal Articulating Mount for 10"- 29"

- Extends 14.46" (367mm) from the wall
- Retracts to 2.42" (61mm) to save space
- Pre-tensioned tilt mechanism offers up to ±35° of one-touch tilt angle adjustment

QP-PA730A (PA730)

Articulating Wall Mount for 22"- 40" Displays

- Integrated cable management system makes running cables simple while keeping the cables protected
- +15°/-5° of tool-less tilt adjustment

QP-SA740PA

PeerAir Wireless HD Multimedia System

- Stream Full HD, 1080p and 3D content wirelessly up to 100 ft. Connects up to 2 HDMI devices. USB gaming/PC port wirelessly connects computer to gaming controller, keyboard or mouse.

QP-HDSWHDI10 (HDS-WHDI100)

Universal Flat Wall Mount for 37"- 75"

- Universal mount fits displays with mounting patterns up to 742mm W x 433mm H
- Low-profile design holds display only 1.25" (32mm) from the wall

QP-SF650PA (SF650PA)

peerless-AV®

Universal Flat Wall Mount for 39"- 80"

- Universal mount fits displays with mounting patterns up to 825mm W x 433mm H
- Increased display compatibility includes VESA® 800 x 400mm mounting hole patterns

QP-SF660P (SF660P)

peerless-AV®

Universal Tilt Wall Mount for 32"- 60"

- Universal mount fits displays with mounting patterns up to 458mm W x 329mm H
- Adjustable up to 15° of forward tilt and -5° backward tilt

QP-ST640PA (ST640P)

peerless-AV®

Universal Tilt Wall Mount for 37"- 75"

- Universal mount fits displays with mounting patterns up to 750mm W x 449mm H
- Adjustable up to 15° of forward tilt and -5° backward tilt

QP-ST650PA (ST650P)

peerless-AV®

Universal Tilt Wall Mount for 39"- 80"

- Universal mount fits displays with mounting patterns up to 832mm W x 449mm H
- Increased display compatibility includes VESA® 800 x 400mm mounting hole pattern

QP-ST660PA (ST660P)

speco technologies



9-7/8" Cutout Speaker Support Bracket (Sold in Pairs)

- Includes 16-3/4" square support and two attachable 2' tile supports
- For use with Speco part #: SP8ECS, SP6MAT
- Sold in pairs

SO-BRC8F (BRC8F)

speco technologies



Speaker Ceiling Support for G86TG and G86TCG (Sold Each)

- T-Bar bridge for ceiling support of 8" speakers with grilles, top hats, etc.
- Heavy gauge steel construction
- Dimensions: 23.63" (W) x 14" (H)

SO-TS8 (TS8)

speco technologies

Back Can for G86TG and G86TCG (Sold Each)

- Heavy-gauge steel construction with undercoating that eliminates any mechanical or acoustical resonance caused by vibration
- Can be used for a back box in ceilings or walls

SO-STH8 (STH8)

W BOX TECHNOLOGIES

Fixed TV Mount

0E-40FM1337
- 13" - 40"

0E-100FM2342
- 23" - 42"

0E-150FM3780
- 37" - 80"

0E-175FM3790
- 37" - 90"

Tilt TV Mount

0E-100TM2342
- 23" - 42"

0E-175TM3780
- 37" - 80"

Full Motion TV Mount

0E-40AM1337
- 13" - 37"

0E-80AM3763
- 37" - 63" Full Motion TV Mount

W BOX TECHNOLOGIES

14 Unit Modular Skeleton Rack

- Weight capacity: 175 lbs wall mounted and 500 lbs. on floor
- Welded sides for quick assembly
- Includes all necessary hardware

0E-CRS14U

A/V Receivers

LEVITON

QuickPort F-Connector, Gold-Plated, White Housing

- Female-female adapter for quick screw-on connections
- 360° gold plated seizing pin provides clearest signal transmission

LV-40831BW (40831-BW)

LEVITON

GigaMax 5e QuickPort Connector, CAT 5e

- Dual wiring code label allows connector to be wired to T568A or T568B. Individual port configurability allows specification flexibility. Robust one-piece lead-frame design.

LV-5G108RO5 (5G108-RO5)

ONKYO®

TX-NR535

- 90 W/Ch (6 Ohms, 1 kHz, 0 7% THD, 2 Channels Driven
- 4K/60 Hz-Capable latest HDMI connections for UltraHD

OC-TXNR525 (OC-TXNR535)

ONKYO®

NEW! 65W x 5 Channel 3D Ready A/V Receiver

- 4 HDMI inputs that support 3D, ARC and HDMI through
- Discrete Amplifier design and TI Burr Brown DACs for cleaner sound
- Front USB port for Direct Digital connection of iPod/iPhone and flash devices
- Dolby® TrueHD and DTS-HD Master Audio for high-definition decoding
- Easy menu control with OSD via HDMI

OC-TXSR313 (TX-SR313)

NEW! 90W x 5 Channel Network Receiver with Built-In Wi-Fi and Bluetooth

- Built-in Wifi and Bluetooth
- Latest HDMI® 2.0 technology (6in/1out) supporting 4K & 3D up to 60 frames/sec
- Exclusive AccuEQ Room Calibration
- Spotify, Pandora, SiriusXM Internet Radio, Slacker, Aupeo! and Tune-In
- Discrete amplifier design with Exclusive WRAT amplifier technology for cleaner sound
- Playback of Hi-Res Audio Files Over Wireless Home Network
- Supports Onkyo Remote App for iPod/iPhone and Android devices

OC-TXNR535 (TX-NR535)

NEW! 115W x 7ch Network AVR with Built-In Wi-Fi and Bluetooth

- Dolby Atmos ready
- Built-in Wifi and Bluetooth
- Latest HDMI® 2.0 technology (7in (1 front)/2out) supporting 4K & 3D up to 60 frames/sec
- HDCP 2.2 Compliant
- Exclusive AccuEQ Room Calibration
- Spotify, Pandora, SiriusXM Internet Radio, Slacker, Aupeo! and Tune-In
- Discrete amplifier design with Exclusive WRAT amplifier technology for cleaner sound
- 3 Stage Inverted Darlington Circuitry for front channels (LCR)
- Playback of Hi-Res Audio Files Over Wireless Home Network and USB
- Powered Zone2 and Zone2 line-out for multi-room playback
- Supports Onkyo Remote App for iPod/iPhone and Android devices

OC-TXNR636 (TX-NR636)

ONKYO

TX-NR737

- 125 W/Ch (6 Ohms, 1 kHz,0.7% THD, 2 Channels Driven, FTC). Dolby Atmos ready.
- THX Select2 Plus Certified. Latest HDMI 2.0 for 4K/60 Hz and HDCP 2.2 compatibility.

OC-TXNR727 (OC-TXNR737)

ONKYO

TX-BR838

- Dolby Atoms Ready. THX Select2Plus Certified. 130 watt/ch (8ohms, 20Hz - 20kHz, 0.08% THD, 2 ch driven FTC). Built in Wi-Fi and Bluetooth. Latest HDMI 2.0 and HDCP 2.2 compatibility. Zone2 HDMI. Exclusive AccuEQ room correction.

OC-TXNR828 (OC-TXNR828)

YAMAHA

Yamaha RX-V377 Surround Receiver

- 100 W x 5-channel output for powerful surround sound
- Discrete amp configuration, HDMI with 4K Ultra HD pass-through for super high resolution images

YM-RXV377BL (RX-V377BL)

YAMAHA

Yamaha RX-V477 5.1-Channel Network AV Receiver

- Spotify, Pandora and vTuner Internet radio streaming services
- AirPlay and HTC Connect device streaming
- High resolution audio FLAC / ALAC / WAV

YM-RXV477BL (RXV477BL)

YAMAHA

Yamaha RX-V577 7.2 Channel Wi-Fi Network AV Receiver

- Wi-Fi BUILT IN, Wi-Fi CERTIFIED and Wi-Fi Direct
- 7-ch surround receiver with Bi-amp capability
- Zone B speaker output and dual subwoofer output

YM-RXV577BL (RXV577BL)

YAMAHA

Yamaha RX-V677 Network 7.2 Channel A/V Receiver

- The latest HDMI version support for 4K Ultra HD 50 / 60p input
- HTC Connect for music streaming from HTC Connect compatible smartphones

YM-RXV677BL (RX-V677BL)

YAMAHA

Yamaha Aventage RX-A740 7.2 Channel Network Receiver

- HDMI: 6 (1 on front) and 1 output with 3D and Audio Return Channel
- Zone max volume and initial volume setting
- Built in WiFi, Spotify, SiriusXM, Internet Radio

YM-RXA730BL (RX-A740BL)

GET IT NOW!

YAMAHA

Yamaha Aventage RX-A840 110 Watt Network Receiver

- HDMI: 8 (1 on front) and 2 outputs with 3D and Audio Return Channel. Zone 2 on/off and control on front panel.
- Built in WiFi with Spotify, Rhapsody, & Sirrus XM

YM-RXA840BL (RX-A840BL)

GET IT NOW!

YAMAHA

Yamaha YST-SW216 100 W 10" Subwoofer

- Advanced Yamaha Active Servo Technology II
- Front Firing Active Subwoofer
- Linear Port to minimize Extraneous Noise
- 10" Long Stroke Driver with Magnetic Shielding

YM-YSTSW216B

GET IT NOW!

YAMAHA

Yamaha Natural Sound Stereo Receiver

- Discrete Circuitry 100W amp
- 40 Station, Am/FM Tuner
- Multiple inputs
- Energy Star Certified

YM-RS201BL (R-S201)

GET IT NOW!

Sign Up Now for FREE!

get more at ADI

NEW! Weekly Electronic Communication Email

- **Monthly promotions**
- **Weekly deals**
- **Sales events**
- **New product launches**
- **Training sessions**
- **ADI's product guide "the book"**
- **Manufacturer line card**
- **Branch locations**

...and much more!

Find the Information You Need Easier & Quicker than Ever!

Visit adiglobal.com/us today to sign up for ADI's get MORE Weekly Electronic Communication Email.

ADI

YOUR BUSINESS DESERVES MORE

more products » more locations » more savings » more support

For orders, call **1.800.233.6261** ▸ For Systems Sales & Support, call ▸ **1.800.234.7971** ▸ On-line catalog @ **adiglobal.com/us**

HDMI™ 1.3 Cat 5 Distribution

- Extend HDMI signal up to 328 ft. (Cat 5e/6/6a/7) at 1080p/60Hz/48-bit
- Uses only one Cat 5e/6/6a/7 cable
- HDMI™ 1.3 and HDCP compliant
- Uses HDBaseT™ Technology
- 3D ready

7C-HX1K3 (HX1K3)

HDMI™ 1.3 Cat 5 Distribution/ RS-232 & I

- Extend HDMI signal using only one Cat 5e/6/6a/7 up to 328 ft. at 1080p/60Hz/48-bit
- Bi-Directional control signal RS-232 allowing status request and control of the destination unit
- Bi-Directional IR control signal (38 KHz maximum)
- Audio transmission supports Dolby TrueHD, DTS-HD MA

7C-HM1CK3 (HM1CK-3)

1 x 8, 1 x 4, 1 x 2, HDMI 1.3 Distribution

- CE labs® HDMI™ A/V Distribution Amplifiers are manufactured with the latest state-of-the-art Silicon Image™ chipset that supports up to 1080p resolution at 60Hz, 36-bit color depth, Dolby® True HD and DTS-HD high bit-rate audio formats to deliver a rich digital video & audio experience
- Enhanced amplified signals for longer cable runs
- Compliant with HDMI™/HDCP requirements and 3D ready
- Supports high-resolution displays of UXGA, 480i, 480p, 720p, 1080i, 1080p
- Secure connection with integrated cable retention bracket

7C-HA83 (900-2210-02)

7C-HA43 (900-2210-02)

7C-HA23 (900-2210-02)

1 x 4, 1 x 5, 1 x 8, Component Distribution

- Distribute HDTV and analog television signals from any single source. Daisy chain several units for larger displays.
- Allows up to 150 ft. runs - 1 x 4, 1 x 5, 1 x 8

7C-AV400COMP (AV400COMP)

7C-AV501HDX (AV501HDX)

7C-AV901COMP (AV901COMP)

MP60/1080P 3D Digital Media Player

- Full high definition 1080P support for MPEG 2, WMV, and H.264
- Economical, compact and easy to carry design makes it great for digital signage applications
- SD card or USB for storage and play
- 3D ready manual switching compatible with top and bottom/side by side 3D files

7C-MP60 (MP60)

Cat 5 Component Extender

- Uses standard CAT 5 or CAT 6 cable
- Can be used with four composite video channels and mono analog audio
- Four RCA connectors for component video and digital SPDIF audio
- Includes 3.5mm to RCA audio cable
- Heavy gauge steel, powder-coated chassis, is corrosion and scratch resistant

7C-C5HDP2 (C5-HDP2)

CHANNEL VISION™

RF Splitter

- PCB printed circuit board design
- DC/IR passing all ports
- 5-1000 MHz bandwidth
- Machine threads, grouding screw

O3-HS2 (HS-2)
- 2-Way Splitter/Combiner
- 3.5dB insertion loss

O3-HS4 (HS-4)
- 4-Way Splitter/Combiner
- 7.0dB insertion loss

O3-HS8 (HS-8)
- 8-Way Splitter/Combiner
- 11.0dB insertion loss

O3-HS3 (HS-3)
- 3-Way Splitter/Combiner
- 5.5dB insertion loss

Comelit®

Single Cat 5 HDMI Signal Extender

- Uses 1 CAT 5E/6 cable to extend HDTV display up to 230 ft. at 1080i and 160 ft. at 1080p. HDMI 1.3 compliant
- Built-in auto-equalization and transmitter unit built-in for EDID backup
- No external power supply required for the receiver unit under distances of 130 feet- HDCP compliant

CU-CXHDMI (CXHDMI)

Comelit®

HDMI Extender Over 1 Cat 5

- Extends HDMI/IR signals over one CAT 5/5e/6 cable
- Uncompressed high definition video up to 1-80p@60Hz@48bits and 3D and 4K*2K up to resolution: 1920x1200 @210 ft.
- Max. data rate- 10.2 Gbps. HDMI 1.4 and HDCP compliant
- Transmission range up to 180 ft. using CAT 5e/6, 210 ft. using CAT 6a cable at 1080p@60Hz@24bit

CU-CHDBT (CHDBT)

Comelit®

CVC VGA to BNC Converter

- Resolution up to 1024x768
- Supports NTSC and PAL

CU-CVC (CVC)

GEFEN

Wireless for HDMI Extender LR (Through-Walls Solution) - Black

- System sends high definition audio and video to any HDTV display up to 100 feet (30 meters) away. It extends HDMI from computers, set-top boxes, Blu-ray players, and others.

GM-WHD1080PL (GTV-WHD-1080P-LR-BLK)

GEFEN

HDMI Extender with POL

- The GefenToolBox Extender for HDMI with POL extends HDMI up to 230 feet (70 meters) using one CAT-6 cable or up to 198 feet (60 meters) using one CAT-5e. Resolutions up to 1080p Full HD with multichannel digital audio are supported. This product provides Bi-Directional IR extension between the Sender and the Receiver unit, allowing the transfer of IR commands from one remote location to the other. Bi-Directional IR can be used to control A/ V sources placed near the Sender unit and to send IR automation commands to devices placed near the Receiver unit. Gefen POL (Power Over Line) technology powers the Receiver unit using the same CAT-5e or CAT-6 cable that extends the HDMI signal from the Sender unit. This feature eliminates the need for an external power supply at the Receiver unit which helps to simplify installation.

GM-HDBTPOLBL (GTB-HDBT-POL-BLK)

GEFEN

Digital Audio Decoder

- The GefenTV Digital Audio Decoder takes audio encoded in Dolby Digital (at up to 5.1 channels) from your multichannel S/PDIF or TOSLINK digital audio source and converts it to L/R analog audio.

GM-DD2AA (GTV-DD-2-AA)

GEFEN

Digital Audio to Analog Adapter

- The Digital to Analog Audio Converter takes your non Dolby Digital coaxial/optical (S/PDIF or TOS Link) digital audio source and converts it to an analog left/right audio with RCA style jacks.

GM-DIGAUD2AA (GTV-DIGAUD-2-AAUD)

GEFEN

Digital Audio Translator

- The GefenTV Digital Audio Translator is a compact and convenient coaxial/TOSLINK audio converter that accepts an audio signal input through either coaxial (S/PDIF) or optical (TOSLINK) cable.

GM-DIGAUDT14 (GTV-DIGAUDT-141)

ICC

F-Type Video Modular Connectors

- 25 pieces per bag
- 2 GHz gold plated connectors
- Female-to-female
- Works with RG-59 and RG-6 coaxial cables

H2-107BGCWH (IC107BGCWH)

ICC

RCA-to-IDC Modular Connectors, White

- RCA gold plated connector
- Red color insert designates right channel audio
- 110-Type IDC allows signal over UTP
- Other colors available

H2-107R8GWH (IC107R8GWH)

ICC

RCA-to-IDC Modular Connector

- RCA gold plated connector
- White color insert designates left channel audio
- 110-Type IDC allows signal over UTP
- Other colors available

H2-107B8GWH (IC107B8GWH)

RCA-to-F-type Modular Connector

- RCA-to-F-type gold plated connector
- Works with RG-6 and RG59 coax cables
- White color insert designates left channel audio
- Other colors available

H2-107BFGWH (IC107BFGWH)

HDMI Décorex™ Insert

- (1) HDMI female-to-female connector
- Supports 1080p, 3D and HDCP
- (2) additional ports for connectivity
- Includes 2 blank inserts

H2-107DH2WH (IC107DH2WH)

VGA 15-Pin Décorex™ Insert

- (1) VGA female-to-female connector
- Supports high quality video
- (2) additional ports for connectivity
- Includes 2 blank inserts

H2-107DR2WH (IC107DR2WH)

Audio Speaker Modular Connectors

- Front push buttons support R and L audio
- Rear crimp-on connector
- Accepts speaker wire up to 16 AWG
- Patented design

H2-107DSCWH (IC107DSCWH)

3.5mm Stereo Jack Modular Connector

- 3.5mm over UTP termination
- Accepts male plug on stereo headsets
- Rear push-pins are marked for polarity
- Works with UtP cable or 22~24 AWG wire

H2-107SAPWH (IC107SAPWH)

HDMI Modular Couplers

- Gold plated female-to-female coupler
- Supports 1080p, 3D and HDCP
- Other colors available

H2-107HDMWH (IC107HDMWH)

RCA-to-RCA Modular Connector

- RCA-to-RCA gold plated connector
- Red color insert designates right channel audio
- No soldering required
- Other colors available

H2-107R6GWH (IC107R6GWH)

RCA Modular Connectors, 5-Pack

- RCA-to-RCA gold plated connectors
- Inserts; 2 red, 1 green, 1 blue, 1 white
- Supports audio/video component connectivity
- Other colors available

H2-107RR5WH (IC107RR5WH)

F-Type Video Modular Connectors

- Female-to-female nickle plated
- Supports 2 GHz
- Works with RG-59 and RG-6 coax cables
- Other colors available

H2-107B5GWH (IC107B5GWH)

- Gold plated connectors

H2-107B5FWH (IC107B5FWH)

- Nickel plated connectors

50' Black Bull CL3 HDMI Cable

- 50 ft. HDMI Male to Male Cable - CL3 Rated

5K-HDRJ50X (HDRJ50X)

Black Bull HDMI Cable

- 21 Gbps Super Sonic Speed, 12-bit Deep Color, 120 Hz Refresh Rate, HDCP
- Supports SD, HD, & VESA (VGA, SVGA, XGA, WXGA, SXGA, UXGA)

5K-HDRJ15 (HDRJ15)

- 1.5 ft. HDMI Male to Male Cable - VW1 Rated

5K-HDRJ3 (HDRJ3)

- 3 ft. HDMI Male to Male Cable - VW1 Rated

5K-HDRJ6 (HDRJ6)

- 6 ft. HDMI Male to Male Cable - VW1 Rated

5K-HDRJ9 (HDRJ9)

- 9 ft. HDMI Male to Male Cable - VW1 Rated

Black Bull 30' HDMI Cable

- 30' Male to Male HDMI Cable (CL3/FT4 Rated)
- 21 Gbps Super Sonic Speed, 16-bit Deep Color, HDCP, 120 Hz, 240 Hz, 480 Hz and 600 Hz
- Supports 3D, SD, HD & Vesa

5K-HDRJ30X (KD-HDRJ30X)

Key digital
The Experts in Digital Video Technology and Solutions™
Black Bull SERIES

Black Bull HDMI Cable

- 21 Gbps Super Sonic Speed, 16-bit Deep Color, HDCP, 120 Hz, 240 Hz, 480 Hz and 600 Hz
- Supports 4K, 3D, SD, HD & Vesa
- Male to Male HDMI Cable (CL3/FT4 Rated)

5K-HDRJ20X (KD-HDRJ20X)
- 20'

5K-HDRJ16X (KD-HDRJ16X)
- 16'

5K-HDRJ12X (KD-HDRJ12X)
- 12'

Key digital
The Experts in Digital Video Technology and Solutions™

Extend HDMI Signals Up to 150'

- Audio Return Channel Support (ARC)
- Supports up to 150' at 1080P/60 Resolution
- Extended Bi-directional IR or one way RS-232
- Lifetime warranty

5K-CATHD150 (KD-CATHD150)

Key digital
The Experts in Digital Video Technology and Solutions™

Champion Series Seamless HDMI Switch

- Key Digital's Full Buffer Technology
- Full Support for HDMI with HDCP
- 12 bit Deep Color Support
- Lifetime warranty

5K-4X1CS (KD-4X1CS)
- 4x1

5K-2X1CS (KD-2X1CS)
- 2x1

Key digital
The Experts in Digital Video Technology and Solutions™

Champion Series Distribution Amplifier

- Key Digital's Full Buffer Technology
- Full Support for HDMI with HDCP
- 12 bit Deep Color Support
- Lifetime warranty

5K-1X4CS (KD-1X4CS)
- 1x4

5K-1X2CS (KD-1X2CS)
- 1x2

MuxLab

HD-SDI Balun 2-Pack

- Supports SD, HD and 3G resolutions
- Up to 150 ft (45m) via Cat 5e cable @ HD
- Up to 400 ft (120m) via Cat 5e cable @ SD

5M-5007012PK (500701-2PK)

MuxLab

Stereo Hi-Fi Video Balun 2-Pack

- Up to 2,200 feet (670m) via Cat 5 UTP
- 20 Hz to 20 kHz audio bandwidth
- Built-in color-coded cable leads

5M-5000392PK (500032-2PK)

MuxLab

Component Video/Stereo Audio Balun 2-Pack

- Supports 720p/1080i/p up to 500 ft (152m) via Cat 5/6
- Supports true Hi-Fi left/right analog stereo audio
- Modular shielded RJ45 connector

5M-5000582PK (500058-2PK)

GET IT NOW!

ONKYO

6-Disc CD Carousel Changer

- Plays Audio CDs, MP3 CDs, CD-R/RWs
- VLSC™ (Vector Linear Shaping Circuitry)
- VQA (Vector Quantizer Audio) conversion technology
- Change Up to 5 discs during play
- Optical and coaxial digital output

OC-DXC390 (DX-C390)

c UL

PREFERRED POWER PRODUCTS

HDMI Cables - High Speed with Ethernet

- 3, 6, 12, 25, 35, 50 foot - HDMI certified
- High speed with ethernet
- Supports full 1080P and 3D capability
- CL3 rated

3P-AN13445 (AN13445)
- 3 ft.

3P-AN13450 (AN13450)
- 6 ft.

3P-AN13690 (AN13690)
- 12 ft.

3P-AN13695 (AN13695)
- 25 ft.

3P-AN13696 (AN13696)
- 35 ft.

3P-AN13697 (AN13697)
- 50 ft.

UL

SECO-LARM Manufacturer of ENFORCER

HDMI Extender Over Dual Cat 5e/6

- Extend HDMI signals over two low-cost Cat 5e/6 cables
- Range: Up to 196 ft. (60m) without any signal loss. Supports up to 1080p.

SL-MVEAH010Q (MVE-AH010Q)

GET IT NOW!

SECO-LARM Manufacturer of ENFORCER

HDMI Matrix and Switcher

- Supports resolutions up to 1080p. Supports 3D.

SL-MVMH4401Q (MVM-AH44-01YQ)
- 4-in, 4-out

SL-MVSAH4101 (MVS-AH41-01NQ)
- 4-in, 1-out

SECO-LARM Manufacturer of ENFORCER

HDMI Extender Over Single Cat 5e/6

- Range: Up to 196ft (60m)
- Supports both progressive and interlaced formats: Up to 1080p
- Comes as a complete set consisting of transmitter, receiver, power supplies, and IR extenders.
- Integrated circuits in the transmitter and receiver clean, buffer, and amplify the HDMI signal to prevent signal loss regardless of the length of the cable.
- Bi-directional IR
- EDID management
- Digital audio out sends HDMI audio directly to an external sound bar or A/V receiver
- ARC Option Switch - Enable Audio Return Channel (ARC) to automatcially switch the audio source to that shown by the display device.
- HDMI Loop output - Secondary local HDMI output

SL-MVEAH030Q (MVE-AH030Q)

Ultra Slim HDMI® High Speed Cable with Ethernet

- A thinner more flexible gauge and smaller connector makes cable management within in racks or behinds TV Mounts easier, cleaner and more efficient

ZX-SSHD1 (SSHD1)
- 1.5 ft.

ZX-SSHD03 (SSHD03)
- 3 ft.

ZX-SSHD06 (SSHD06)
- 6 ft.

ZX-SSHD10 (SSHD10)
- 10 ft.

Super Flex Flat HDMI® High Speed M/F Adapter Cable

- The Ultimate HDMI Adapter - Supports 3D, 4Kx2K, 1080P, ARC, and Ethernet.
- Data Speed Transfer: Exceeds 10.2 Gbps.

ZX-233216X (233216X)
- 6 in.

ZX-233201X (233201X)
- 1 ft.

High Speed HDMI® Cable with Ethernet and RedMere™ Chip

- HDMI cables with RedMere technology are thinner, lighter, more flexible, and easier to route in a home theater. Supports 3D and 4Kx2K.
- Data Speed: Exceeds 10.2 Gbps

ZX-RDM020 (RDM020)
- 20 ft.

ZX-RDM025 (RDM025)
- 25 ft.

ZX-RDM035 (RDM035)
- 35 ft.

ZX-RDM050 (RDM050)
- 50 ft.

Evolution HDMI® 1x2 4K2K Splitter

- Allows 1 HDMI source to be displayed on up to 2 HDMI displays. Features EDID management.
- Supports 4K2K (2160p) Ultra High Definition resolution

ZX-EVSP1002 (EVSP1002)

Evolution HDBaseT Boost Extender 230ft/70m

- Patent Pending Boost feature allows for HDBaseT and Ultra High Definition transmission over out of date HDMI cables. Wideband IR signal from 20KHz to 60KHz, EDID pass through

ZX-EVEX2230 (EVEX2230)

Evolution HDMI® over Single Cat5e/ Cat6 Cable Extender

- Allows HDMI audio/video signals to be transmitted 131 ft. using a single Cat5/6 Cable. Features EDID, EQ and Wideband IR (20-60 KHz)

ZX-EVEX2005 (EVEX2005)

SVGA Cable

- 28AWG

0E-SVGAAMM10 (C15M15MS10)
- SVGA Cable M-M
- 10 ft.

0E-SVGAAMM25 (C15M15MS50)
- SVGA Cable M-M
- 50 ft.

0E-SVGAAMF25 (C15M15FS25)
- SVGA Cable M-F
- 25 ft.

Digital Audio Cable

- Toslink 2.2mm Digital Audio

0E-CTOS3 (CTOS3)
- 3 ft.

0E-CTOS6 (CTOS6)
- 6 ft.

RCA Cable

- L/R Stereo Audio

0E-CRCA23 (CRCA23)
- 3 ft.

0E-CRCA26 (CRCA26)
- 6 ft.

RCA "Y" Cable

0E-VCY7BKG1 (VCY7BKG1)
- (1) RCA Female to (2) RCA Male
- 1 ft.

0E-VCY6BKG1 (VCY6BKG1)
- (1) 3.5mm Stereo Male to (2) RCA Female
- 1 ft.

0E-VCY3BKG6 (VCY3BKG6)
- (1) 3.5mm Stereo Male to (2) RCA Male
- 6 ft.

0E-VCY3BKG3 (VCY3BKG3)
- (1) 3.5mm Stereo Male to (2) RCA Male
- 3 ft.

0E-VCY1BKG1 (VCY1BKG1)
- (1) RCA Male to (2) RCA Female
- 1 ft.

Component Video Cable

0E-RGBW12 (RGB12X)
- Component RGB Cable M-M
- RG59
- 26AWG
- 12 ft.

0E-RGBWB6 (RGB6X)
- Component RGB Audio Cable x3 M-M
- 26AWG
- 6 ft.

Audio Cable

- Coaxial Digital Audio Cable
- 1xRCA M-M
- 24AWG
- 6 ft.

0E-ACDA6 (AC3DA6)

HDMI/System Components & Distribution

High Speed HDMI Cable with Ethernet

- Supports 3D, 4K x 2K and 1080p video resolutions
- UL listed and CL3 rated

0E-HDMI01
- 1 ft.

0E-HDMI03
- 3 ft.

0E-HDMI06
- 6 ft.

0E-HDMI10
- 10 ft.

0E-HDMI12
- 12 ft.

0E-HDMI15
- 15 ft.



High Speed HDMI Cable with Ethernet (continued)

0E-HDMI20
- 20 ft.

0E-HDMI25
- 25 ft.

0E-HDMI35
- 35 ft.

0E-HDMI50
- 50 ft.

High Speed Directional HDMI Cable with Ethernet

- Supports 1080p video resolutions
- Data speed transfer: exceeds 102 Gbps
- Directional cable
- UL listed and CL3 rated

0E-HDMI75
- 75 ft.

0E-HDMI100
- 100 Ft.

iPod Docks

Black Sleeve for iPad 4th Generation

- Wireless Inductive charging and mounting for iPad 4th generation
- Wave-guide redirects iPad speaker audio back at you

DN-70181 (70181)

Black Sleeve for iPad Mini

- Wireless Inductive charging and mounting for iPad mini
- Form fitting sleeve includes power and volume accessibility

DN-70175 (70175)

Control Mount Mini

- Allows Wi-Fi connection
- Great for automation, security, commercial, and digital signage
- Charges the iPad mini while mounted

DN-70094 (70094)

iPort

Wall Station White

- Wireless Inductive charging and mounting for iPad. Magnetic wall mounting and removal.
- 360˚ rotation allows iPad to be in landscape or portrait while mounted

DN-70142 (70142)

GET IT NOW!

iPort

LaunchPort Base Station

- Allows you to charge and mount your iPad
- Mount in portrait or landscape
- Maintains total iPad functionality while charging
- Must be used with LaunchPort Sleeve

DN-70141 (70141)

ONKYO

iPod/iPhone/iPad Dock with Airplay

- Audio and video playback from iPod®/iPhone®/iPad®
- AirPlay capability
- Wi-Fi certified
- iPod nano (2nd, 3rd, 4th, 5th, and 6th gen), iPod classic (80 GB, 120 GB, 160 GB), iPod touch (1st, 2nd, 3rd, and 4th gens), iPhone, iPhone 3G, iPhone 3GS, iPhone 4, iPhone 4S; iPad, iPad (Wi-Fi + 3G), iPad 2 (Wi-Fi), iPad 2 (Wi-Fi + 3G), New iPad

OC-DSA5 (DS-A5)

Remotes & IR Systems

CHANNEL VISION™

All-In-One-IR-Kit

- Plasma, sunlight, LED proof
- 36" Receiver to hub
- Control devies behind cabinet doors
- Mounting Accessories Included:

O3-IR5000 (IR-5000)

GET IT NOW!

PRO CONTROL

Pro24.r Remote Control

- 2.4" color touch screen remote with control via IR, or 433 MHz RF when used with ProLink.r processor
- IR learning, efficient wizard based programming

UB-PRO24R (11-500003-10)

UL ETL MEA approved

GET IT NOW!

PRO CONTROL

ProLink.r

- Advanced central processor with 433 MHz RF compatible only with Pro Control Pro24.r remote
- Support for one-way control from PC, tablets and smart phones via apps. IR and Ethernet control.

UB-PROLINKR (11-500006-13)

GET IT NOW!

PROFICIENT

IR Plasma Kit

- Compatible with most Plasma, LCD, LED and DLP
- Kit includes all parts for a one room system setup:
  * 1 IR Plasma Receiver, 1 IR Router
  * 1 IR 250mA Power Supply, 4 IR Single Flashers

C1-IRPLASKIT (IRPLASKIT)

PROFICIENT

IR Mini-Black Kit

- Kit includes all parts for a one room system setup:
  * 1 IR mini Receiver-Black, 1 IR Router
  * 1 IR 250mA Power Supply, 4 IR Single Flashers

C1-IRMINIKTB (IRMINIKTB)

URC Control the Experience.

MX-980 Wand-Style IR/RF PC Programmable Hard Button Remote

- Brilliant 2.4" color LCD screen
- 12 pre-labeled customizable hard buttons
- Includes lithium ion battery and charger base

UT-MX980 (MX-980)

URC Control the Experience.

MX-IOS MRX KIT

- 1 CC control mobile iOS app setup card
- 1 MRX-2 network base station
- 1 RFX-250 418 MHz RF antenna
- Also available for Android devices

UT-MXIOSMRXK (MX-IOS MRX KIT)

URC Control the Experience.

MX-780 IR/RF Wand Style Hard Button Remote

- One remote supports every function
- Color OLED screen uses less energy
- Simple PC programming enables fast setup

UT-MX780 (MX-780)

URC Control the Experience.

MX-450 IR/RF Color LCD Remote Control

- Bright 2" color LCD with color graphics
- NO PC or Internet connection required for programming; on-screen macro editing
- Built-in pre-programmed database

UT-MX450 (MX-450)

MX-890 Programmable Color LCD Remote Control

- 2" full color, high-resolution screen for customized graphics and control
- Easy install and setup via URC CCP programming
- Includes lithium ion battery and charging cradle

UT-MX890 (MX-890)

CC Control Mobile App Setup Card

- iPhone®, iPod Touch® and iPads® into A/V control devices
- Requires URC MRX-2 Base Station
- Unlimited iDevices per Setup Card
- Also available for Android devices

UT-MXIOS (MX-IOS)

MRF-260 Addressable RF Base Station

- Addressable RF Base Station with integrated antenna. Built-in front panel IR blaster.
- (4) independently routed IR outputs (2 adjustable & 2 fixed)

UT-MRF260 (MRF-260)

MRF-350 Addressable, Modular RF Base Station

- Six (6) independently routed emitter outputs
- Built-in front panel IR blaster
- Available with 418MHz or 433MHz RFX-250 antenna. Multi-zone compatible.

UT-MRF350 (MRF-350)

MRX-2 Network Base Station

- One MRX-2 required with one URC CC Control Mobile App
- 6 IR outputs and 6 adjustable IR outputs
- 1 Local Area Network (LAN) port
- Optional RFX-250 antenna for RF commmuni-cation

UT-MRX2 (MRX-2)

One Zone Six Source IR Kit

- Allows IR control from up to 6 sources to be connected and transmitted to one display. Range: 40 ft at 38 kHz & 25 ft at 56 kHz

ZX-280731 (280731)

Designer Emitter Shield Cover

- Shield cover for designer emitters
- Effective for covering component IR eyes for IR

VO-28DES

Standard High Output Designer Emitter

- Clear adhesive film included on emitter housing for attachment to IR window of controlled component. 10 ft. long.
- Includes 3 pre-cut adhesive backings

VO-282D

Blink-IR Visible Designer Emitter

- Clear adhesive film for attachment to IR window of controlled component. Length of wire: 10 feet
- Includes 3 pre-cut adhesive backings for replacement purposes.

VO-283D

Dual Designer Emitter

- Two emitters in series with each other and terminated in a single 3.5mm mono mini plug
- Length of wire: 7 feet to junction, 3 feet to each emitter. Non-visible, high output version.

VO-284D

DL85K DinkyLink™ IR Receiver Kit

- Compatible with all types of TV's as well as all satellite and cable TV boxes. Works with CFL lighting.
- Works with remotes up to 80 feet away

VO-DL85K (DL85K)

Know More!

Talk, Tips, and Trade Information

ADI BLOG blog.adiglobal.us

The ADI Blog is your information pipeline to the latest news, technical methods, installation tips and newest technologies.

JOIN US TODAY!

CineMate® 1 SR Home Theater Speaker System

- Simple setup: Easily connects directly to your HDTV, no receiver required
- Customized sound for your room's size, shape and furnishings

BD-329198110 (329198-1100)

SoundTouch™ Wireless Adapter

- Compatible with Lifestyle® 535, 525, 135 Series II and VideoWave® III entertainment systems
- Simplified, step-by-step onscreen instructions
- Six personalized presets for streaming your

BD-625146011 (625146-0110)

Bose® Solo TV Sound System

- Wide, even sound throughout the room from Bose speaker array technology
- More effects, music and dialogue, clearly and naturally, with proprietary digital signal processing

BD-347205130 (347205-1300)

SoundTouch™ 20 Wi-Fi® Music System

- Surprisingly clear, room-filling sound for its size
- Great for bedrooms, the kitchen or other medium-size rooms

BD-355589120 (355589-1200)

SoundTouch™ 30 Wi-Fi® Music System

- Our most powerful one-piece Wi-Fi music system
- Exclusive waveguide speaker technology fills your largest room with deep, rich sound
- Perfect to use as your main music system

BD-354441120 (35444-1120)

Virtually Invisible® 191 In-Wall Speakers

- Flush-mount speaker design for in-wall installation
- Spacious, natural sound from two 2.5" full-range drivers

BD-31509 (31509)

BOSE
Better sound through research.

SoundTouch™ SA-4 Amplifier Package

- Easily connects to your speakers for powerful sound
- Automatically adjusts tonal balance for full, rich lows at nearly all listening levels

BD-361755110 (361755-1100)

GET IT NOW!

EMPHASYS

CL60 In-Ceiling LCR Speaker

NEW@ADI

- 6-1/2" polypropylene woofer
- 1" pivoting silk dome tweeter. 100 Watts.
- Dia. x depth: 9-1/4" x 4-9/16"; Ceiling cut out: 8-1/4"

E6-CL60 (CL60)

GET IT NOW!

EMPHASYS

DC60 Dual Channel In-Ceiling Speaker

NEW@ADI

- 6-1/2" dual voice coil polypropylene woofer
- Two 1/2" fixed hard dome tweeters. 75 Watts.
- Dia x Depth: 9-1/4" x 3-5/8"; Ceiling cut out: 8-1/4"

E6-DC60 (DC60)

GET IT NOW!

EMPHASYS

IC60 In-Ceiling Speakers

NEW@ADI

- 6-1/2" polypropylene woofers
- 3/4" fixed silk dome tweeters. 75 Watts.
- Dia x Depth: 9-1/4" x 3-5/8"; Ceiling cut out: 8-1/4"

E6-IC60 (IC60)

GET IT NOW!

EMPHASYS

IO50 Indoor/Outdoor Stereo Speakers

NEW@ADI

- 5-1/4" polypropylene woofers
- 1" pivoting soft dome tweeters
- 125 Watts
- Dimensions (H x W x D): 9-1/2" x 6-3/4" x 6"

E6-IO50WHT (IO50WHT)

GET IT NOW!

KEF
INNOVATORS IN SOUND

Application Specific 2" Round In-Ceiling

- 2" Full-Range Speaker Round
- Designed to match halogen & other modern lighting
- Installs in seconds without need for tools

KD-CI50WHITE (Ci50 White)

GET IT NOW!

Application Specific 4" Round In Ceiling

- 4" Uni-Q 2-Way Round
- Designed to match halogen and other modern lighting
- Installs in seconds without the need for tools

KD-CI100QR (Ci100QR)

New! Hi-Performance 6.5" with Thin Bezel

- 2-Way with UTB Ultra-Thin-Bezel design & magnetic grills
- Asymmetrical tweeter island for wide off-axis response and sound coverage

KD-CI160CR (Ci160CR)

New! Hi-Performance 6.5" with Thin Bezel

- 125W 6.5" Uni-Q 2-Way with new UTB Ultra-Thin-Bezel design and magnetic grills
- KEF patented Uni-Q "point-source" driver array fills the entire room with sound

KD-CI160QR (Ci160QR)

World's Thinnest In-Ceiling Speaker

- Ultra-thin in-ceiling speaker based on our award winning high performance T Series product line
- Requires only about 1" of mounting depth past the sheetrock. Mount in-ceiling where nothing else will.
- Ultra-thin bezel for the latest cosmetic design & magnetic grills for a fast installation

KD-Ci160TR (Ci160TR)

Ultra-Thin Passive LCR Soundbar – 100W

- Ultra-thin to match up with popular LED thin TVs
- Aluminum enclosure for exceptional fit & finish & sound
- 2-way design uses 3 drivers per channel

KD-HTF7003 (HTF7003)

Compact & Stylish Hi-Performance Subwoofer

- Compact 8" subwoofer fits many installs with it's diminutive size at only 11.6" x 11.6"
- Powerful, musical output with dual 8" drivers and 250 Watt amplifier
- Stylish design with high-gloss black top panel looks as good as it sounds

KD-KUBE1 (KUBE1)

Klipsch

In-Ceiling Speakers

- Horn-loaded technology increases acoustic output while significantly reducing distortion
- Controlled Directivity Technology™ directs high and midbass frequencies

KQ-CDT2650CI (CDT-2650CII)

KQ-CDT2800CI (CDT-2800CII)

Klipsch

HD Theater 600 Home Theater System

- The Klipsch HD Theater 600 comes with four satellite speakers, a matching center channel speaker and a powerful subwoofer. It's a complete, compact surround system that affordably adds crisp dialogue, brilliant music and explosive effects to your video content.

KQ-HDTHEATER (HD THEATER 600)

Klipsch

Speaker Installation Kit

- Increased mounting flexibility
- Color-coded brackets for easy speaker size identification. Breakaway wire tie.
- Easily align speakers with other items in ceiling

KQ-IK800W (IK-800-W) Wall/8 woofer

KQ-IK650C (IK-650C) Ceiling/6.5 woofer

KQ-IK650W (IK-650W) Wall/6.5 woofer

Klipsch

In-Ceiling Speaker

- Good sensitivity and power handling
- Employs a 6.5-inch polymer-cone woofer and large motor structure for high sensitivity
- Distributes smooth clear highs over a wide area

KQ-R1650C (R-1650C)

Klipsch

In-Ceiling Speaker

- Single speaker accepts two-channel input
- Separate tweeters for each channel to preserve stereo effect
- High sensitivity and strong bass output

KQ-R1650CSM (R-1650CSM)

Klipsch

In-Ceiling Speaker

- Good sensitivity and power handling: works well with 100 watt/channel receivers
- Elegant new, low-profile SlimTrim™ magnetic grille. Rugged ABS frame.

KQ-R2650CII (R-2650CII)

Klipsch

In-Ceiling Speaker

- Employs an 8-inch polymer-cone woofer and large motor structure for high sensitivity
- Paintable aluminum grille provides added rust protection in moisture-prone areas

KQ-R1800C (R-1800C)

Klipsch

In-Wall Speaker

- Employs a 6.5-inch polymer-cone woofer and large motor structure for high sensitivity and strong bass output
- Distributes smooth clear highs over a wide area

KQ-R1650W (R-1650W)

Klipsch

In-Wall Speaker

- Good sensitivity and power handling
- Works well with 100 watt/channel receivers
- Elegant new, low-profile SlimTrim™ magnetic grille. Rugged ABS frame.

KQ-R2650WII (R-2650WII)

Klipsch

Subwoofer

- Sleek modern design complements today's HDTVs

KQ-SW350 (SW-350)

- 8-inch driver produces amazing bass response with low distortion and outperforms some 10-inch subs!
- Built-in amplifier delivers 350 booming watts

KQ-SW450 (SW-450)

- Powerful 10-inch driver offers increased bass response with low distortion
- Built-in Class D amplifier delivers 450 watts

PROFICIENT

Pre-Construction Brackets

- Fits Proficient 6-1/2" ceiling speakers, 6-1/2" single stereo ceiling speakers and 6-1/2" ceiling LCR speakers

C1-PCBC600 (PCBC600)

PROFICIENT

Pre-Construction Brackets

- One pair of pre-construction brackets for new construction
- Fits Proficient 8" ceiling speakers, 8" single stereo ceiling speakers and 8" ceiling LCR speakers

C1-PCBC800 (PCBC800)

PROFICIENT

Pre-Construction Brackets

- One pair of pre-construction brackets for new construction
- Fits Proficient 6-1/2" inwall speakers

C1-PCBW600 (PCBW600)

PROFICIENT

IW630 Inwall LCR Speaker

- New thin-bezel design replaces IW625
- Two 6-1/2" graphite woofers. 1" pivoting soft tweeter. Contour switches. 125 Watts
- Wall Cut Out (H x W): 7-1/2" x 14-1/2"

C1-IW630 (IW630)

PROFICIENT

IW530 Inwall LCR Speaker

- New thin-bezel design replaces IW525
- Two 5-1/4" graphite woofers. 1" pivoting alum tweeter. Contour switches. 100 Watts
- Wall Cut Out (H x W): 6-3/16" x 14-1/2"

C1-IW530 (IW530)

PROFICIENT

W692 Inwall Speakers

- New thin-bezel design replaces W690
- 6-1/2" Kevlar woofers. 1" pivoting alum tweeters
- Contour switches. 150 Watts
- Wall Cut Out (H x W): 10-7/8" x 6-3/4"

C1-W692 (W692)

PROFICIENT

W682 Inwall Speakers

- New thin-bezel design replaces W680
- 6-1/2" graphite woofers. 1" pivoting alum tweeters
- Contour switches. 125 Watts
- Wall Cut Out (H x W): 10-7/8" x 6-3/4"

C1-W682 (W682)

PROFICIENT

W802 Inwall Speakers

- New thin-bezel design replaces W800
- 8" graphite woofers. 1" pivoting alum tweeters
- Contour switches. 150 Watts
- Wall Cut Out (H x W): 13-5/8" x 8-3/4"

C1-W802 (W802)

PROFICIENT

C625TT Single Stereo Ceiling Speaker

- New thin-bezel design replaces C600TT
- 6-1/2" dual voice coil polypropylene woofer
- Two 1/2" hard dome tweeters
- 75 Watts • Ceiling Cut Out: 8-1/4"

C1-C625TT (C625TT)

PROFICIENT

C621 Ceiling Speakers

- New thin-bezel design replaces C620
- 6-1/2" polypropylene woofers
- 1" pivoting silk dome tweeters
- 100 Watts • Ceiling Cut Out: 8-1/4"

C1-C621 (C621)

PROFICIENT

C641 Ceiling Speakers

- New thin-bezel design replaces C640
- 6-1/2" graphite woofers
- 1" pivoting aluminum dome tweeters
- Contour switches. 125W. Ceiling Cut Out: 8-1/4"

C1-C641 (C641)

PROFICIENT

C791 Ceiling Speakers

- New thin-bezel design replaces C790
- 8" polypropylene woofers
- 1" pivoting soft dome tweeters
- 125 Watts. Ceiling Cut Out: 9-3/4"

C1-C791 (C791)

PROFICIENT

C651 Ceiling LCR Speaker

- New thin-bezel design replaces C650
- Woofer & tweeter bridge fixed at 15°
- 6-1/2" poly woofer. 1" pivoting silk tweeter
- 100 Watts. Ceiling Cut Out: 8-1/4"

C1-C651 (C651)

PROFICIENT

C661 Ceiling LCR Speaker

- New thin-bezel design replaces C660
- Woofer & tweeter bridge fixed at 15°
- 6-1/2" graphite woofer. 1" pivoting aluminum tweeter. 125 Watts. Ceiling Cut Out: 8-1/4".

C1-C661 (C661)

PROFICIENT

C841 Ceiling LCR Speaker

- New thin-bezel design replaces C840
- Woofer & tweeter bridge fixed at 15˚
- 8" graphite woofer. 1" pivoting silk tweeter
- Contour switches. 150W. Ceiling Cut Out: 9-3/4"

C1-C841 (C841)

PROFICIENT

C871 Ceiling LCR Speaker

- New thin-bezel design replaces C870
- Woofer & tweeter bridge fixed at 15˚
- 8" Kevlar woofer. 1" pivoting aluminum tweeter
- Contour switches. 175W. Ceiling Cut Out: 9-3/4"

C1-C871 (C871)

PROFICIENT

PS8 Floor-Standing Subwoofer, 8"

- Power: 80 Watts RMS; LFE input; Overload circuit
- Auto power on/off; Slotted rear-firing port
- Black wood grain finish
- Dimensions (H x W x D): 12-3/8" x 9-7/8" x 16"

C1-PS8 (PS8)

PROFICIENT

PS10 Floor-Standing Subwoofer, 10"

- Power: 120 Watts RMS; LFE input; Overload circuit
- Auto power on/off; Slotted rear-firing port
- Black wood grain finish. Dimensions (H x W x D): 15-1/8" x 11-1/2" x 17-1/2".

C1-PS10 (PS10)

PROFICIENT

PS12 Floor-Standing Subwoofer, 12"

- Power: 250W RMS Class D Amp; LFE Input; Overload circuit
- Black wood grain finish. Dimensions (H x W x D): 18-1/4" x 14-1/16" x 17-1/4".

C1-PS12 (PS12)

Russound

Acclaim 5 Series OutBack Loudspeaker, White

- Rich, full sound in extreme environments like decks and backyards
- Install with Russound controllers to double your warranty
- Also available in black, 5.25", 6.5" and single point

RD-5B45W (3165-532832)

Russound

Acclaim RSF-61 Thin Bezel Speaker

- Big sound in a sleek package, featuring magnetic grill & thin bezel with square grill option
- 6.5" woofer with 3/4" Pivoting PEI tweeter

RD-RSF61 (3175-533945)

Russound

Acclaim RSF-61T Single-Point Thin Bezel Speaker

- Single point 6.5" woofer with (2) .75" silk tweeter. Ceiling cut out: 8.375", sold each.
- Featuring thin bezel & magnetic square or round grille option

RD-RSF61T (3175-533983)

Russound

Acclaim RSA-61 Thin Bezel Speaker

- 6.5" woofer with 1" pivoting PEI tweeter
- Featuring thin bezel & magnetic square or round grille options. Speakers sold each.

RD-RSA61 (3175-533914)

Russound

Acclaim RSF-62 Thin Bezel Speaker

- Featuring thin bezel & magnetic square or round grille option
- Install with Russound controllers to double your warranty. 6.5" woofer with 1" silk tweeter.

RD-RSF62 (3175-533952)

Russound

OutBack Rock Speaker, Sandstone

- Perfect for patio, pools and backyards
- Install with Russound controllers to double warranty
- Also available in gray granite or weathered granite; single point stereo models available as well

RD-5R82S (3165-533471)

speco technologies

8" x 11" 70/25V Weatherproof ABS Speaker Horn (Sold Each)

- Weatherproof ABS construction
- Built-in selectable 70/25V transformer with taps of 30W, 15W, 10W, 5W, 3W and 1W
- Mounting hardware included

SO-SPC30RT (SPC30RT)

speco technologies

6.5" 70/25V speaker (Sold Each)

- 6.5" Polypropylene woofer with rubber surround
- Built-in selectable 70/25V transformer with taps of 40W, 30W, 15W, 7.5W, 5W, 2.5W, 1W, 0.5W, 0.25W and 8 Ohms. Built-in ABS backcan.

SO-SP6MAT (SP6MAT)

speco technologies

5.25" 70/25V Speaker (Sold Each)

- 5.25" Polypropylene woofer with rubber surround
- Built-in selectable 70/25V transformer with taps of 30W, 15W, 7.5W, 5W, 2.5W, 1W, 0.5W, 0.25W and 8 Ohms. Built-in ABS backcan.

SO-SP5MAT (SP5MAT)

speco technologies

AWX Series All-Weather Extreme Indoor/Outdoor Speakers - Black (Sold in Pairs)

- 5.25" Polypropylene woofer with rubber surround and .75" silk dome tweeter
- Built-in selectable 70V transformer with taps of 40W, 20W, 10W, 5W, 2.5W and 8 Ohms
- Stylish Indoor/outdoor wall-mount design with mounting hardware
- Also available in White SO-SP5AWXTW

SO-SP5AWXT (SP5AWXT)

speco technologies

6.5" 70/25V Indoor/Outdoor Wall-Mount Speaker - Black (Sold in Pairs)

- 6.5" Polypropylene woofer with rubber surround
- Built-in selectable 70V transformer with taps of 50W, 25W, 12.5W, 6W, 3W and 8 Ohms
- Stylish Indoor/outdoor wall-mount design with mounting hardware
- Also available in White SO-SP6AWXTW

SO-SP6AWXT (SP6AWXT)

speco technologies

8" Dual Paper Cone Ceiling Speaker with Transformer (Sold Each)

- 8" dual paper cone classic grille ceiling speaker with transformer
- 5W dual 70/25V transformer (with taps of 5W, 2.5W, 1W, 0.5W, 0.25W & 8 Ohms) with color coded leads
- Uses optional BRC8 mounting bracket
- Also available in with Volume Control SO-SPG86TC

SO-SPG86T (SPG86T)

speco technologies

G86 Series 70/25V Classic Round Commercial Ceiling Speaker with Transformer (Sold Each)

- 8" dual paper cone ceiling speaker with transformer. 5W dual 70/25V transformer (with taps of 5W, 2.5W, 1W, 0.5W, 0.25W & 8 Ohms) with color coded leads.

SO-G86TG (G86TG)

speco technologies

8" 70/25V Weatherproof PA Speaker Horn (Sold Each)

- Woofer: 5.25" polypropylene with rubber surround
- Wattage: 30 Watts/RMS 60 watts max.
- Transformer: Selectable 70/25V with taps of: 30W, 15W, 7.5W, 5W, 2.5W, 1W, 0.5W, 0.25W and 8 Ohms
- Also available in White SO-SP30PT

SO-SP30PTB (SP30PTB)

speco technologies

8" 70/25V Weatherproof PA Speaker Horn (Sold Each)

- Weatherproof Aluminum construction
- Built-in selectable 70/25V transformer with taps of 15W, 10W, and 3.7W at 25V and 15W, 10W, 5W, 3W, and 1W at 70V
- Mounting hardware included

SO-SPC15T (SPC15T)

speco technologies

6.5" UL-Listed 70/25V Speaker

- 6.5" Polypropylene woofer with rubber surround and 3/4" silk dome tweeter
- Built-in selectable 70V transformer with taps of 30W, 15W, 7.5W, 3.7W, 1.9W and 8 Ohms
- Built-in metal back can
- Sold in pairs and includes mounting brackets

SO-SP6NXCTUL (SP6NXCTUL)

W BOX TECHNOLOGIES

Frameless In Ceiling Speakers

- Frequency response: 46 Hz-22,000 Hz
- RMS power: 50 Watts
- Max power: 120 Watts
- Impedance: 8 ohms
- Contains 1 speaker

0E-IC6C

- 6" 3/4' Tweeter

0E-IC6M

- 6" 1" Tweeter

W BOX TECHNOLOGIES

Universal Pre-Construction Bracket

- Universal guide for speaker installation
- For speakers from 3.5" to 12.5"

0E-EZBracket

W BOX TECHNOLOGIES

Frameless In Ceiling Speakers

- Frequency response: 60 Hz-20 kHz
- RMS power: 60 Watts
- Max power: 120 Watts
- Impedance: 8 ohms
- Contains 2 speakers
- 6.5"

0E-ICF6560W

W BOX TECHNOLOGIES

Bluetooth Wireless Soundbar with Subwoofer

0E-SB65

- 80 Watt powered soundbar
- Four 2.5" midrange drivers
- Two 1.25" tweeters
- 135 Watt powered subwoofer
- 6.5" long throw woofer

0E-SB80

- 120 Watt powered soundbar
- Six 2.5" midrange drives
- Two 1.25" tweeters
- 180 Watt powered subwoofer
- 8" long trow woofer

GET IT NOW!

YAMAHA

Yamaha YAS-103 Blutooth Soundbar with Built-In Subs

- Bluetooth wireless music streaming from your smartphone or tablet
- TV remote repeater forwards infrared signals to TV even if the YAS-103 is blocking the TV's sensor.
- Integrated system equipped with dual front speakers and dual-driver subwoofer

YM-YAS103BL (YAS-103BL)

YAMAHA

Yamaha YAS-152 Soundbar with Built-In Subs for 55" and Above TV

- Bluetooth wireless music streaming from your smartphone or tablet
- Dual built in subwoofers deliver powerful bass sounds with superior imaging

YM-YAS152BL (YAS-152BL)

GET IT NOW!

YAMAHA

Yamaha Top Selling Slim Bezel, Magnetic Grill Multi-Room Speaker

- Magnetic grill, large mounting feet, 5 way binding posts
- Polypropylene mica cone woofer for mid/low sound reproduction

YM-NSIC600WH (NS-IC600WH)

GET IT NOW!

YAMAHA

Yamaha Brings Their Speaker Expertise Outside For The Season

- Two-way bass reflex design: Powerful woofer delivers accurate mid/low frequency response; Balanced dome tweeter ensures clear high frequency response

YM-NSAW194WH (NS-AW194WH)

YM-NSAW294WH (NS-AW294WH)

GET IT NOW!

ADI PRICE ASSURANCE

We will meet any distributor's current promotional pricing!*

subject to proof of competitor's offering

AudioSource®

Impedance Matching Volume Control

- 100 Watt maximum per channel
- 39 dB of attenuation
- Selectable impedance matching switch settings
- Removable right angle solderless terminals
- Includes knob, faceplate, decora insert, and screws in three different colors (ivory, bone, and white)

UI-AE100VC (AE100VC)

AudioSource®

AMP100 Two-Channel Power Amplifier

- 50 Watts per channel (8 ohm)/60 Watts per channel (4 ohm). 160 Watts bridged mono. Line 1/Line 2 priority input switching with Line 2 auxiliary output.

UI-AMP100 (AMP100)

AudioSource®

AMP102 Two-Channel Power Amplifier

- 50 Watts per channel (8 ohm)/75 Watts per channel (4 ohm)
- 150 Watts bridged mono
- Line 1/Line 2 priority input switching with Line 2 auxiliary output
- Front panel balance, volume, and speaker A/B switching controls
- Front panel diagnostic LED's
- Signal sensing "Power On" and 12VDC "Trigger On"
- 120/230VAC multi-voltage
- Optional rack mount kit available

UI-AMP102 (AMP102)

AudioSource®

AMP110 Two-Channel Power Amplifier

- 75 Watts per channel (8 ohm)/110 Watts per channel (4 ohm)
- 225 Watts bridged mono
- Line 1/Line 2 priority input switching with Line 2 auxiliary output
- Front panel balance, volume, and speaker A/B switching controls
- Front panel diagnostic LED's
- Signal sensing "Power On" and 12VDC "Trigger On"
- 120/230VAC multi-voltage
- Optional rack mount kit available

UI-AMP110 (AMP110)

AudioSource®

AMP210 Two-Channel Power Amplifier

- 90 Watts per channel (8 ohm)/125 Watts per channel (4 ohm)
- 250 Watts bridged mono
- Line 1/Line 2 priority input switching with Line 2 auxiliary output
- Front panel balance, volume, and speaker A/B switching controls
- Front panel diagnostic LED's
- Signal sensing "Power On" and 12VDC "Trigger On"
- 120/230VAC multi-voltage
- Optional rack mount kit available
- Speaker level input
- Triple Darlington power amplifier stages
- Dual-Differential input for improved noise reduction

UI-AMP210 (AMP210)

AudioSource®

AMP310 Two-Channel Power Amplifier

- 150 Watts per channel (8 ohm)/225 Watts per channel (4 ohm)
- 450 Watts bridged mono
- Line 1/Line 2 priority input switching with Line 2 auxiliary output
- Front panel balance, volume, and speaker A/B switching controls
- Front panel diagnostic LED's
- Signal sensing "Power On" and 12VDC "Trigger On"
- 120/230VAC multi-voltage
- Optional rack mount kit available
- Speaker level input
- Triple Darlington power amplifier stages
- Dual-Differential input for improved noise reduction

UI-AMP310 (AMP310)

AudioSource®

AMP1200 Audio Distribution Amplifier

- Six Zones/Twelve Channels
- 40 Watts per channel (8 ohm/4 ohm) [12 channels]
- 80 Watts mono [6 channels]
- Independent channel inputs and two bus inputs
- 12 independent gain controls
- Front panel diagnostic LED's
- Signal sensing "Power On" and 12VDC "Trigger On"
- 120/230VAC multi-voltage
- Rack mount included

UI-AMP1200 (AMP 1200)

AudioSource®

S3D650 3D Soundbar with Sonic Emotion™

- 200 Watts total power
- Sonic Emotion™ 3D Surround DSP
- Bluetooth, digital coaxial, optical, and analog RCA inputs
- Subwoofer RCA output
- Remote learning function
- Includes: remote control

UI-S3D650 (S3D650)

ICC

F-Type Video Modular Connectors

- Female-to-female gold plated
- Supports 2 GHz
- Works with RG-59 and RG-6 coax cables
- Other colors available

H2-107B5GWH (IC107B5GWH)

GET IT NOW!

ICC

F-Type Video Modular Connectors

- Female-to-female nickle plated
- Supports 3 GHz
- Works with RG-59 and RG-6 coax cables
- Other colors available

H2-107B9FWH (IC107B9FWH)

GET IT NOW!

LEVITON

Hi-Fi 2 8 Zone, 8 Source Kit with Enclosure

- Use free app to control audio throughout your home or business
- Includes 8 local inputs with 4 Remote Input Modules (RIM). Add optional Bluetooth Remote Input Modules (BRIM).
- Also includes 8 OLED display volume source controls with digital controls
- Expandable to 16 zones using expansion amplifier kit

2H-95A001 (95A00-1)

NetMedia

Class-D Stereo 40W Audio Amplifier

- Works with iPod®'s, laptops, MP3/CD/DVD players
- Drives floor, bookshelf, ceiling, and wall speakers
- Compact & portable at 2.7" long x 2.2" wide x 1.0" high
- Includes 24VDC 2 Amp power supply
- Runs cool and green at 92% efficiency

NF-KICKAMP40 (NM-kickAMP-40)

NUVO®
Whole Home Audio

P3500 Professional Series Player 3-Zone IP-Based Amplifier

- 200 watts per zone for three independent audio zones
- Built-in access to streaming Internet Radio and networked audio content
- Pristine high-fidelity audio
- Compatible with NuVo's other players for up to 16 zones
- Connects to storage devices, analog equipment, or home theater receivers through audio line-in, line-out, or USB ports
- Convenient app control from Apple and Android mobile devices
- Simple integration with third-party automation
- World-renown Audyssey™ music technology for optimal listening with Dynamic Volume

XW-NVP3500NA (NVP3500NA)

P3100 Professional Series Player 3-Zone IP-Based Amplifier

- 40 watts per zone for three independent audio zones
- Built-in access to streaming Internet Radio and networked audio content
- Pristine high-fidelity audio
- Compatible with NuVo's other players for up to 16 zones
- Connects to storage devices, analog equipment, or home theater receivers through audio line-in, line-out, or USB ports
- Convenient app control from Apple and Android mobile devices
- Simple integration with third-party automation
- World-renown Audyssey™ music technology for optimal listening with Dynamic Volume

XW-NVP3100NA (NVP3100NA)

P200 Player Single Zone IP-Based Amplifier

- 120 watts for a single zone of pristine, high-fidelity audio
- Flexible wired or wireless configuration
- Built-in access to streaming Internet Radio, networked audio content, and Bluetooth enabled devices
- Compatible with NuVo's other players for up to 16 zones
- Connects to storage devices, analog equipment, or home theater receivers through audio line-in, line-out, or USB ports
- Convenient app control from Apple and Android mobile devices
- Simple integration with third-party automation
- World-renown Audyssey™ music technology for optimal listening with Dynamic Volume

XW-NVP200NA (NVP200NA)

P100 Player Single Zone IP-Based Amplifier

- 40 watts for a single zone of pristine, high-fidelity audio
- Flexible wired or wireless configuration
- Built-in access to streaming Internet Radio and networked audio content
- Compatible with NuVo's other players for up to 16 zones
- Connects to storage devices, analog equipment, or home theater receivers through audio line-in, line-out, or USB ports
- Convenient app control from Apple and Android mobile devices
- Simple integration with third-party automation
- World-renown Audyssey™ music technology for optimal listening with Dynamic Volume

XW-NVP100NA (NVP100NA)

NUVO Whole Home Audio

Concerto® 8 Zone, 6 Source Whole Home Audio System

- 80 watts of power per zone for eight zones
- Music can be shared in eight rooms, all playing the same song or different tunes at once
- Six independent source inputs for listening variety throughout the home
- Direct wiring for clean audio transfer without distortion or interruption
- High-performance amplifier operates coolly and saves energy
- Displays Song and Album information from NuVoNet smart audio source components for easy navigation
- Allows for access and control through whole home automation system using RS-232
- System can be expanded to sixteen zones using the Concerto® Expander

XW-NVI8GMS (NVI8GMS)

NUVO Whole Home Audio

Essentia® 6 Zone, 6 Source Whole Home Audio System

- 40 watts of power per zone for six zones
- Music can be shared in six rooms, all playing the same song or different tunes at once
- Six independent source inputs for listening variety throughout the home
- Direct wiring for clean audio transfer without distortion or interruption
- High-efficiency amplifier operates coolly and is the most energy efficient system of its kind
- Displays Song and Album information from NuVoNet smart audio source components for easy navigation
- Allows for access and control through whole home automation system using RS-232
- System can be expanded to twelve zones using the Essentia® Expander

XW-NVE6GMSDC (NVE6GMSDC)

NUVO Whole Home Audio

Simplese® 4 Zone, 4 Source Whole Home Audio System

- 30 watts of power per zone for four zones
- Music can be shared in four rooms, all playing the same song or different tunes at once
- Four independent source inputs for listening variety throughout the home
- Direct wiring for clean audio transfer without distortion or interruption
- High-efficiency amplifier operates coolly and is the most energy efficient system of its kind
- The easy to use controller installs into the wall offering a low profile way to manage your system
- Allows for access and control through whole home automation system using RS-232
- Can be expanded to eight zones using a second Simplese® system

XW-NVA4DSDC (NVA4DSDC)

NUVO Whole Home Audio

Music Port® Streaming Audio Source

- Provides four independent streams of audio simultaneously
- Features incredible listening variety through both internal storage and streaming Internet Radio
- Stored content auto syncs with networked computers for easy access to entire libraries
- Offers easy browsing by artist, album, song, genre, and more with NuVoNet provided metadata
- Allows convenient app control for Apple and Android devices

XW-NVMPS4 (NVMPS4)

PROFICIENT

VC60SL Volume Control

- Slider stereo volume control
- 60 Watts continuous; 120 Watts peak music power
- Fits in most single-gang J-boxes & plaster rings

C1-VC60SL (VC60SL)

PROFICIENT

VCS60 Volume Control

- Stereo volume control with autoformer
- 60 Watts continuous; 120 Watts peak music power
- Fits in most single-gang J-boxes & plaster rings

C1-VCS60 (VCS60)

PROFICIENT

VC45i Volume Control

- Impedance-balancing volume control with autoformer
- 45 watts continuous; 90 watts peak music power
- Fits in most single-gang J-boxes & plaster rings

C1-VC45I (VC45i)

PROFICIENT

VC60i Volume Control

- Impedance-balancing volume control with autoformer
- 60 Watts continuous; 120 Watts peak music power

C1-VC60I (VC60i)

PROFICIENT

SS4P Speaker Selector

- Resistor-based on/off speaker selector
- Provides convenient access for up to four stereo pairs. 125W per channel.
- Front & rear protection switches

C1-SS4P (SS4P)

Russound

4-Pair Speaker Selector, Single Source

- Designed for high audio quality & long-term reliability. Provides impedance matching and automatic overload protection compatible with high-power amplifiers.

RD-SS42 (SS-4.2)

Russound

ALTx-2D Volume Control Tri-Color

- 126 Watt decor volume control
- Lifetime warranty
- White, almond, light almond plates & knobs included

RD-ALTX2D (6100-534195)

Russound

DMS-3.1 Digital Media Streamer

- Stream network content with ease
- Supports Apple AirPlay, Pandora, SiriusXM, TuneIn, DLNA and vTuner Internet Radio
- Works with C-series controllers and the MyRussound app (IOS and Android compatible)

RD-DMS31 (2450-533419)

Russound®

Controller Streamer Amplifier

- WiFi enabled streamer, 50w amplifier, and controller all in one
- Wirelessly streams Pandora, iTunes™, SiriusXM, vTuner and Apple™ Airplay™
- Multiple connectivity and integration options
- Control via keypad or My Russound App (iOS and Android)

RD-X5 (X5)

Multi-Channel Wireless Transmitter

- 4 zone wireless audio transmitter
- 3 line level inputs, 1 selectable line in or optical
- 2.4, 5.2, and 5.8 GHz, channel-hopping and fixed-channel operation
- Multiple receivers can be used for each zone; 100 ft range

RD-X1TX8 (X1-TX8)

Wireless Receiver

- Wireless Line-level Receiver for the X1-TX8
- Line-level and digital outputs for high-quality audio without long cable runs
- High quality wireless performance
- Ultra-small footprint; includes versatile mounting bracket

RD-X1RX2 (X1-RX2)

Wireless Receiver Amplifier

- Wireless Audio Receiver Amplifier for the X1-TX8
- Internal 2 x 20 watt amplifier
- High quality wireless performance
- Ultra-small footprint; includes versatile mounting bracket

RD-X1RX220 (X1-RX220)

Bluetooth® Remote Transceiver

- Remote transceiver allows ideal placement for system-wide coverage
- Stream Bluetooth® audio from up to 49' away
- Add Bluetooth® to XStream X5 Single
- CAT-5 wiring and custom naming for easy identification

RD-BTC1X (BTC-1X)

Bluetooth® Source Kit

- Remote transceiver allows ideal placement for system-wide coverage
- Single CAT-5 wiring and custom naming for easy identification
- Can be configured as a system source or local source for C-Series Systems

RD-BSK1 (BSK-1)

Bluetooth® Local Source Module

- Add a Bluetooth® local source to any A-BUS zone
- Integrates easily with existing A-BUS systems
- Custom naming for easy identification

RD-BTA1 (BTA-1)

Russound

C-Series Kit KT2-C3

- 6 source/6 zone controller kit includes NEW MDK-C6 keypads, remote, rack ears, antenna & IR emitters. Free configuration software.
- 20W per zone & built-in AM/FM tuner

RD-KT2C3 (1550-534362)

Russound

C-Series Kit KT2-C5

- 8 source/8 zone controller kit includes NEW MDK-C6 keypads, remote, rack ears, antenna & IR emitters. Free configuration software.
- 40W X 2 digital amps & built-in AM/FM tuner

RD-KT2C5 (1550-534324)

Russound

A-BUS Amplified Keypad

- Uncomplicated control of basic audio functions
- Controllable by an A-BUS system remote
- Variable line-level output allows connection to an external amplifier or powered subwoofer

RD-AK4 (2000-534591)

Russound

2-Channel Digital Amp with Local Source Switching

- Switches speakers between local source & distributed audio system. 1U 1/2 rack chassis offers 3 mounting options. Channels are bridgeable to create one channel with substantial power output.

RD-D250LS (2800-533280)

Russound

BSK-1 Bluetooth Source Kit

- Add Bluetooth streaming to any multi-room audio installation and wirelessly connect your Android or iPhone from up to 15 meters away

RD-BSK1 (2460-533778)

Russound

Two-Channel X-Series Amplifier X75

- 75 Watts per channel into 4 Ohms, and 60 Watts into 8 Ohms; bridgeable to 160 Watts at 8 Ohms
- Auto-source switching, 2 audio line inputs with loop out to other zone

RD-X75 (2800-533020)

SECO-LARM Manufacturer of ENFORCER

VGA and Audio Distributor over Cat 5e/6

- Transmits VGA and digital audio signals from a single source to multiple locations
- Extends VGA range up to 984 ft. (300m) over one Cat 5e/6 cable
- Supports up to 1920 x 1200 resolution
- Each set includes 1 transmitter and 1 receiver

SL-MVDV15011 (MVD-V1501-1Q)

- 1-in, 5-out

SL-MVDV12011 (MVD-V1201-1Q)

- 1-in, 2-out

SL-MVDV11011 (MVD-V1101-1RQ)

- Additional receiver

SL-MVAVH01Q (MVA-VH01Q)

- VGA to HDMI converter, supports up to 1280 x 1024 resolution with audio

speco technologies

10W 70V Line Transformer

- Convert any 8 Ohms speaker for use in a 70V system
- Wattage taps of 10W, 5W, 2.5W, 1.25W, and 0.625W. Color coded leads.

SO-T7010 (T7010)

GET IT NOW!

speco technologies

10W Volume Control, Silver and Black

- Designed to handle up to 10W of 70 or 25V speakers
- 9 volume steps plus off position
- Fit in a standard single gang, high cube junction box
- Also available in White SO-WAT10W

SO-WAT10 (WAT10)

VANCO ADVANCING CONNECTIVITY

HDMI® IR Control Kit

- Allows for IR control over any HDMI cable. Extends IR signals more than 100m/328 ft.
- Supports dual band IR, IR or CEC configurable

ZX-280700 (280700)

GET IT NOW!

W BOX TECHNOLOGIES

Analog Audio Cables and Adaptors

0E-CRCA23

- 3 Ft M-M Stereo RCA Cable

0E-CRCA26

- 6 Ft M-M Stereo RCA Cable

0E-VCY1BKG1

- RCA Male Stereo to Dual RCA Female

0E-VCY3BKG3

- 3 Ft Dual RCA Male to 3.5MM Stereo Male

0E-VCY3BKG6

- 6 Ft Dual RCA Male to 3.5MM Stereo Male

0E-VCY6BKG1

- 3.5MM Stereo Male to Dual RCA Female

0E-VCY7BKG1

- RCA Stereo Female to Dual RCA Male

GET IT NOW!

W BOX TECHNOLOGIES

126 Watt In Wall Single Gang Volume Controller

- Power handling: 63 Watts per channel/125 Watts peak power
- Total attenuation: 42 dB (Max)
- Frequency response: 20 Hz – 20 kHZ
- Colors included: white, bone, almond

0E-VC126

GET IT NOW!

6 ft. and 12 ft. Video Stereo Cable

0E-RGBWB6
- 6'

0E-RGBWB12
- 12'

SVGA with Audio Cable

0E-SVGAAMM6
- 6 ft. M-M

0E-SVGAAMM10
- 10 ft. M-M

0E-SVGAAMM25
- 25 ft. M-M

0E-SVGAAMF25
- 25 ft. M-F

0E-SVGAAMM50
- 50 ft. M-M

ADI

YOUR BUSINESS DESERVES MORE

Connect with us.

ADI BLOG

adiglobal.com

Commercial Sound

Tabletop Microphone Set

- Condenser gooseneck microphone with a cardioid polar pattern on a slim, 30cm long gooseneck. Can be programmed for push to talk, push to mute, push on/off, low cut on/off. LED indicates microphone's status. Gold plated 3-pin XLR audio output.

A4-CGN321STS (CGN 321 STS)

AKG Plug & Play Hanging Microphone

- Hanging microphone module with cardioid polar pattern, for music or speech in houses of worship, conference rooms or on theater stages. The CHM99 is available in black or white. 33 ft. cable is treated to reduce twisting and a spring steel hanging clamp for precise mounting is included. Phantom power adapter included.

A4-CHM99 (CHM-99)

Commercial XM Satellite Audio Receiver

- RG-6 F-connector on back panel for antenna input. Bi-directional RS-232 serial data port; mono and stereo RCA outputs. Front panel lockout & channel blocking to prevent tampering. Adjustable line level output for component matching. Designed specifically for commercial environments with optional 2RU rackmount.

5A-XM100 (XM-100)

YOUR BUSINESS DESERVES MORE

Commercial AV Solutions:

EDUCATION:
- Schools
- Colleges
- Universities
- Day care facilities

RETAIL:
- Malls
- Grocery stores
- Convenience stores

HEALTHCARE:
- Hospitals
- Healthcare organizations
- Doctor offices

MILITARY:
- Command & control centers
- Training facilities
- Network operation centers
- Remote field video conferencing
- Briefing/debriefing rooms

BANKING:
- Banks
- Branch offices

TRANSPORTATION:
- Airports
- Subway Systems
- Traffic control centers

HOSPITALITY:
- Resorts
- Restaurants
- Hotels
- Casinos
- Sports venues

INDUSTRIAL:
- Warehouses
- Factories
- Construction sites
- Manufacturing facilities

GOVERNMENT:
- Council chambers
- Training facilities
- Meeting rooms
- Museums
- Libraries
- Courtrooms
- Stadiums & arenas
- Performing Arts facilities
- Convention centers

HOUSE OF WORSHIP:
- Main sanctuary
- Overflow rooms
- School classrooms
- Off-site evangelism

Your Source for Commercial AV Solutions

Leading Brands in Stock Every Day at ADI!

AKG, ALLEGRA, APC by Schneider Electric, Atlas Sound, AXIS COMMUNICATIONS, BELDEN SENDING ALL THE RIGHT SIGNALS, BOGEN COMMUNICATIONS, INC.
BOSCH Invented for life, CAPTURE, eLabs Cable Electronics, CHIEF, Comelit, crown, dbx PROFESSIONAL PRODUCTS
D-Link Building Networks for People, DRAPER www.draperinc.com, EV, ELITE SCREENS, ELK PRODUCTS, GEFEN, GOLD LINE MANUFACTURED IN U.S.A. SINCE 1911, HITACHI
Honeywell, JBL, JVC, Key digital The Experts in Digital Video Technology and Solutions, LEVITON, LUTRON Innovations in Lighting Control
LUXUL, Marshall PRO A/V, Middle Atlantic Products, MINUTEMAN POWER TECHNOLOGIES, NADY SYSTEMS INC., NEC, OMNIMOUNT, OWI OWI Incorporated
paso PROFESSIONAL AUDIO & SOUND, peerless-AV, PICO DIGITAL, posh Speaker Systems, PRO CONTROL, QSC AUDIO, Quam
SHARP, SHURE, SONY, Soundcraft A Harman International Company, speco technologies, TELEX, TOTE VISION
TRIPP·LITE, URC Control the Experience., VANCO ADVANCING...CONNECTIVITY, ViewSonic, VMP VIDEO MOUNT PRODUCTS, WILLIAMS SOUND HELPING PEOPLE HEAR, xantech

Shop Online, In Our Branches, Over the Phone, or through our Catalogs

One Stop Shopping for Total Solutions

- Displays/Flat Panels
- Digital Signage
- Speakers
- Amplifiers & Receivers
- Projectors & Screens
- Outdoor Displays
- Audio & Video Distribution
- Power, Backup & Surge Protection
- Networking & Connectivity
- IP Video Surveillance
- Control & Automation
- Wire & Cable
- Accessories
- Racks & Mounts
- Tools & Testing Equipment
- IP Intercom and Telephony

ADI

YOUR BUSINESS DESERVES MORE

more products » more locations » more savings » more support

intrusion | fire | video surveillance | access | power | audio/video | networking | telephony | central vac | tools & hardware | wire & cable

For orders, call **1.800.233.6261** ▸ For Systems Sales & Support, call ▸ **1.800.234.7971** ▸ On-line catalog @ **www.adiglobal.com/us**

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for **Restaurants/Bars**

A simple to install yet feature-rich system for restaurants & bars includes local control of multiple zones of video and audio. Individual selection of any source to any zone for audio or video allows the user to tailor the entertainment to suit the occasion. Powerful audio processing and digital video distribution make the system look as good as it sounds and it comes with a paging microphone.

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- [ ] **Key Digital** 5K-4X4CSX
  4 inputs-4 outputs HDMI via Dual Cat 5e/6 Matrix Switcher
- [ ] **Sony** T7-KDL55W80B
  Sony 55" 1080P LED TV
- [ ] **W Box Technologies** 0E-CRCA26
  6 ft. M-M Stereo RCA Cable (4x)
- [ ] **W Box Technologies** 0E-150TM3780
  37"-80" Tilt TV Mount
- [ ] **DBX** 9D-640
  Zone Pro 6-Inputs, 4-Outputs (1x)
- [ ] **DBX** 9D-ZC8
  Push Button Volume Control (4x)
- [ ] **DBX** 9D-ZCBOB
  Zone Controller (1x)
- [ ] **Universal Remote** UT-MRX2
  2-Way Base Station (1x)
- [ ] **Universal Remote** UT-KP4000C
  WiFi Color Touchscreen Remote (1x)
- [ ] **Universal Remote** UT-RS232M
  6pk RS232 CBL MSC400 with Male DB9 (1x)
- [ ] **Crown** 5C-CDI1000
  275W @ 8ohm Lightweight Amp (2x)
- [ ] **JBL** JF-C25TBLK
  5.25" 2-Way Speaker with Transformer (8x)
- [ ] **TrendNet** TQ-TPES44
  8-Port (4 10/100, 4 POE) POE SWT (1x)
- [ ] **Bogen** BO-MBS1000A
  Desk Mountable Microphone (1x)
- [ ] **Omnimount** 3O-RE27
  Enclosed Rack System (1x)
- [ ] **Middle Atlantic** NO-D2LK
  2-Space Rack Drawer w/key (1x)
- [ ] **APC** 2G-G5BLK
  15 Amp 120V Rack Mount Power Filter (1x)
- [ ] **BLACK BULL** 5K-HDRJ6
  6' HDMI Cable (4x)
- [ ] **BLACK BULL** 5K-HDRJ3
  3' HDMI Cable (4x)
- [ ] **ICC** H2-107F02WH
  2-Port SGL Gang Wallplate - White (4x)
- [ ] **ICC** H2-1078F5WH
  C5E High Density MOD Connector - White (4x)
- [ ] **ICC** H2-1078F5BL
  C5E High Density MOD Connector - Blue (4x)
- [ ] **SR Components** R5-C5EPCWH2
  2' CAT5 Enhance - White (4x)
- [ ] **SR Components** R5-C5EPCBL2
  2' Cat 5E Crimped P/C - Blue (4x)
- [ ] **Honeywell** WG-50781101
  24/4 C5E Crimped 1M Box - White (1x)
- [ ] **Honeywell** WG-50781106
  24/4 C5E Crimped 1M Box - Blue (1x)
- [ ] **Honeywell** WG-11185501
  18/2 STR JKT 5C Box (as needed)
- [ ] **Honeywell** WG-50781105
  24/4 C5E Crimped 1M Box (1x for audio keypads)
- [ ] **Platinum Tools** TS-100003C
  50pc EZ-RJ45 Cat 5 Connectors (1x)
- [ ] **Platinum Tools** TS-100054C
  EZ-RJ Pro HD Crimp Tool (if needed)
- [ ] **Honeywell** WG-12145509
  Wire for Microphone (1x)
- [ ] **Bi-Tronix** BI-CANC3MX
  3-Pin Male XLR Connector (1x)
- [ ] **Bi-Tronix** BI-CANC3FX
  Female XLR Cable Mount (1x)

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for **Boardrooms**

This boardroom system is great for professional meeting spaces in corporate environments. Its sleek and elegant style is sure to impress while not being over-budget. Audio reinforcement is provided through 4 JBL ceiling speakers and it has multiple video source capability like the Included Blu-Ray/DVD player or a personal computer (not supplied). The display is a high quality 60" LED flat panel TV with 1080p resolution. We even include a pre-assembled rack and power conditioning. This system is perfect for any modern, corporate environment.

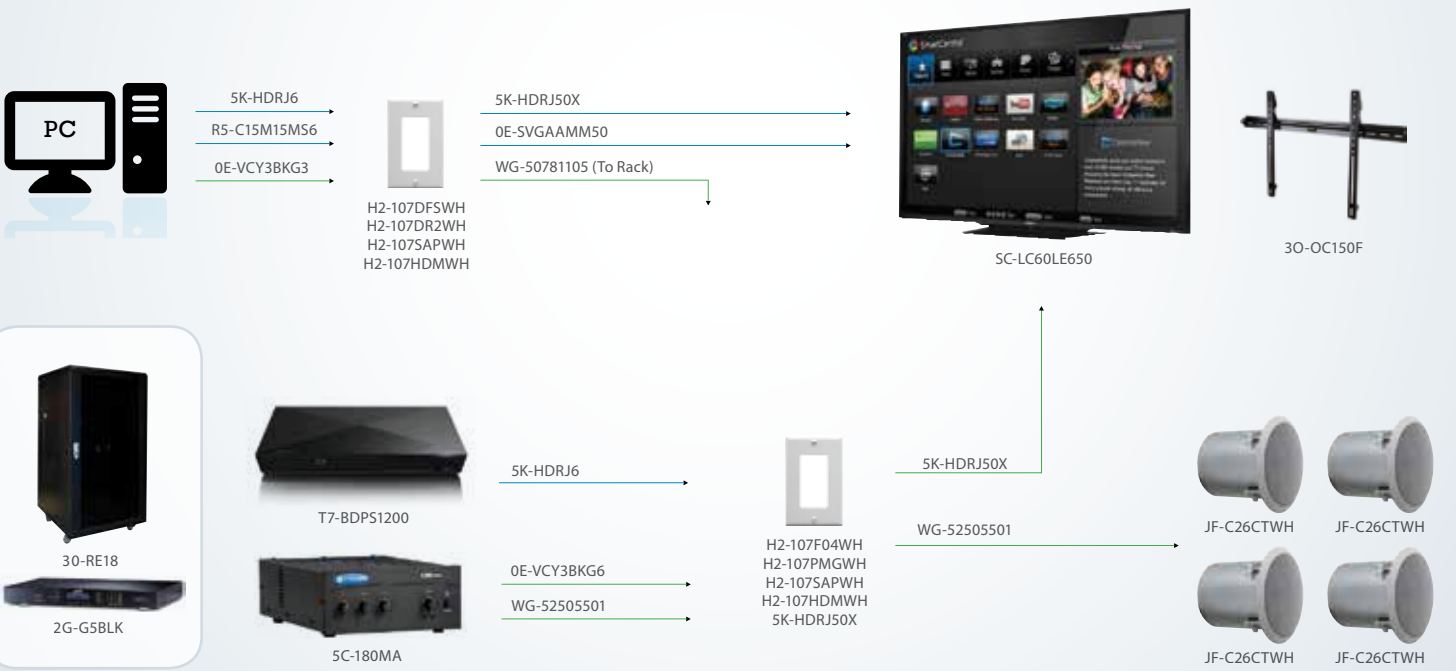

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- **Sharp** SC-LC60LE650
  60" LED 120 Hz 1080P TV (1x)
- **Omnimount** 3O-OC150F
  Flat Panel Wallmount (1x)
- **Omnimount** 30-RE18
  Fully Assembled Enclosed Rack (1x)
- **Sony** T7-BDPS1200
  Sony Blu Ray Player
- **Crown** 5C-180MA
  Mixer AMP (1x)
- **JBL** JF-C26CTWH (sold as pair)
  6.5" Coaxial Ceiling Speakers (2x pair)
- **APC** 2G-G5BLK
  Rack Mount 15 Amp Power Filter (1x)
- **W Box Technologies** 0E-SVGAAMM6
  6 Ft M-M SVGA w/Audio Cable
- **W Box Technologies** 0E-SVGAAMM50
  50 ft. M-M SVGA w/Audio Cable
- **W Box Technologies** 0E-VCY3BKG3
  3 Ft Dual RCA Male to 3.5MM Stereo Male
- **W Box Technologies** 0E-VCY3BKG6
  6 ft. 3.5mm "Y" Cable (2x)
- **SR Components** R5-C15M15S6
  6 ft. VGA Cable (1x)
- **Key Digital** 5K-HDRJ6
  6 ft. HDMI M/M Cable (2x)
- **Key Digital** 5K-HDRJ3
  3 ft. HDMI M/M Cable (2x)
- **Key Digital** 5K-HDRJ50X
  50 ft. HDMI M/M Cable (2x)
- **Key Digital** 5K-HDRJ3
  6 ft. L/R Stereo Audio (1x)
- **Genesis** WG-52505501
  500 ft. Box Audio Cable (1x)
- **Genesis** WG-50781105
  1000 ft. Pull Box Network Cable (1x)
- **ICC** H2-107DFSWH
  Faceplate Surround (2x)
- **ICC** H2-107DR2WH
  2-Port Decorex VGA Insert (2x)
- **ICC** H2-107SAPWH
  3.5mm Stereo Audio Module (2x)
- **ICC** H2-107HDMWH
  HDMI-HDMI Female Module (4x)
- **ICC** H2-107F04WH
  4-Port Single Gang Faceplate (1x)
- **ICC** H2-107PMGWH
  Speaker Binding Posts (1x)
- **Vanco** ZX-280573
  HDMI® Audio Extractor

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for **Classrooms**

This classroom system can be used for educational spaces, grades K-12, or corporate environments in training rooms. It provides audio reinforcement through ceiling speakers and utilizes a wireless microphone to give a presenter the freedom to interact with his/her students. Video sources can include Blu-Ray/DVD players or personal computers that display on a 7' diagonal screen via a 2400 lumen projector with XGA resolution. We even include a pre-assembled rack. This cost effective system is a valuable tool for an instructor to deliver any message.

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- **Hitachi** HP-CPEX250N
  Hitachi Projector
- **Peerless** QP-PJF2UNV
  Projector Ceiling Mount (1x)
- **Peerless** QP-CMJ500R1
  Suspended Ceiling Kit (1x)
- **Draper** DF-207008
  7 ft. Diagonal Screen (1x)
- **Atlas Sound** AT-SD72W
  8" Dual Cone Ceiling Speaker (4x)
- **Atlas Sound** AT-EZ958
  Ceiling Speaker Baffle & Mounting Kit (4x)
- **Crown** 5C-135MA
  35 Watt Mixer Amp (1x)
- **Crown** 5C-RM1
  Amp Rack Mount Kit (1x)
- **Nady** ND-ENCORE1LT
  Wireless Microphone System (1x)
- **Nady** ND-ERM12
  Rack Mount Kit for Wireless Receiver (1x)
- **Sony** T7-BDPS1200
  Blu-Ray Player (1x)
- **Vanco** ZX-AC3K72
  6 ft. 3.5mm to RCA Cable
- **Proco** PO-SMM5
  5 ft. XLR Cable (1x)
- **Key Digital** 5K-KDCS6HIFI
  6 ft. Stereo RCA Cable
- **Key Digital** 5K-HDRJ50X
  50 ft. HDMI Cable
- **W Box Technologies** 0E-SVGAAMM6
  6 ft. M-M SVGA w/Audio Cable
- **W Box Technologies** 0E-SVGAAMM25
  25 ft. M-M SVGA w/Audio Cable
- **Genesis** WG-11185009
  500 ft. Reel Box Bare Control Cable (1x)
- **Genesis** WG-50025508
  500 ft. Reel Box Bare A/V Cable (1x)
- **Gem Electronics** GE-1006CSTP
  RG6 RCA Male Compression 10P (1x)
- **Arlington** 9N-CE1
  Recessed Cable Wall Plate (2x)
- **Pro Co** P0-WPE005
  SS Gang Plate 1 VGA, 2 RCAs (1x)
- **Omnimount** 3O-RE18
  Enclosed 18-Space Rack Assembly (1x)
- **APC** 2G-G5BLK
  15 Amp Rack Power Filter (1x)
- **Key Digital** 5K-HDRJ3
  VW1 Rated HDMI Cables, Full HD 1080P, 3 ft.
- **Vanco** ZX-280573
  HDMI® Audio Extractor
- **Vanco** ZX-AC3K72
  3.5mm Stereo Plug to 2 RCA Female Jacks "Y" Adapter

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for **Medical Offices**

A simple to install value priced audio system designed for today's Medical Offices. This is an essential tool for Receptionists, Nurses and Doctors to communicate easily. The multiple speaker zone solution allows the user to project their message to various locations and gives the ability to add a background music source with zone volume control using the second set of inputs on the amplifier. This system can be setup with a phone system output or the optional gooseneck microphone for more powerful, clear announcements.

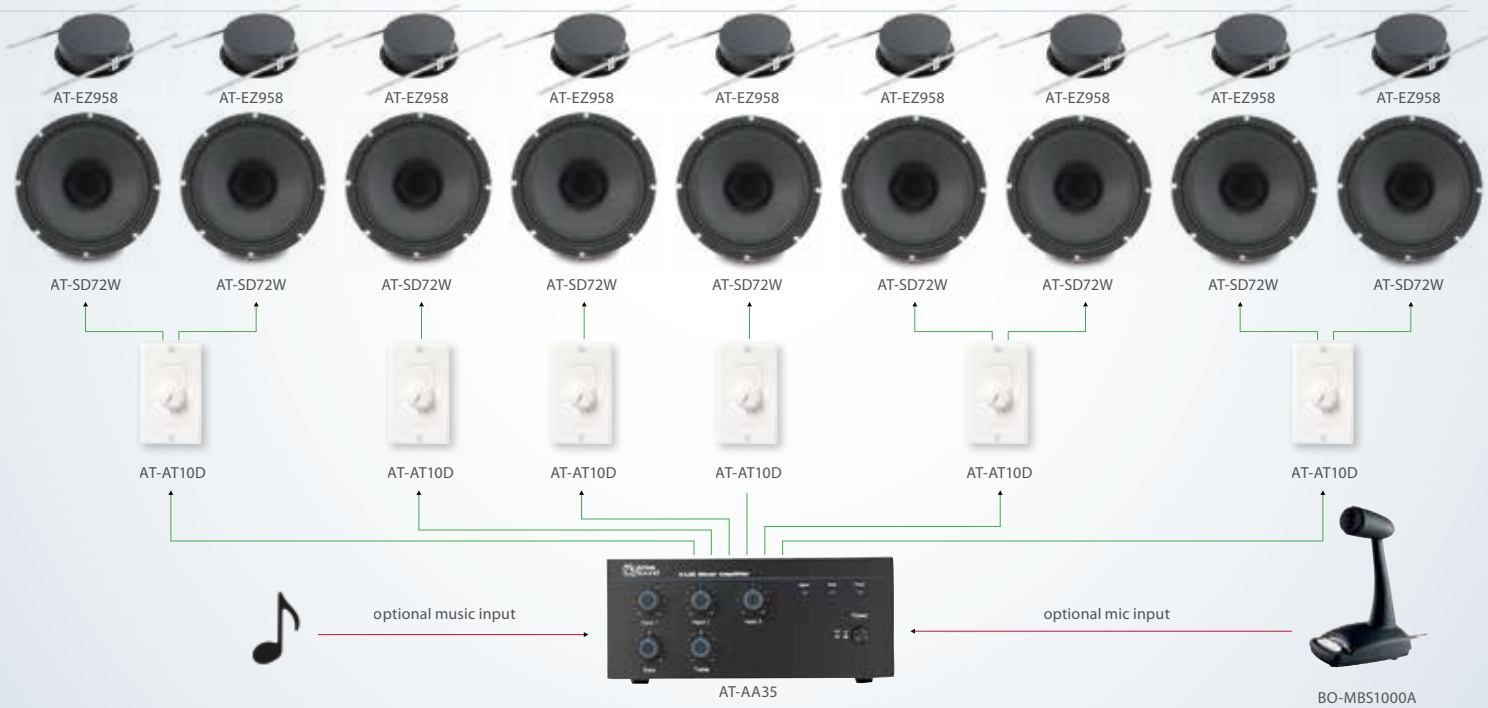

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **Atlas Sound** AT-SD72W
  AT/ SND SPKR, BAFFLE, XFMR WHITE (9x)
- ☐ **Atlas Sound** AT-EZ958
  AT SND ENC 95-8NS RAIL MNT (9x)
- ☐ **Atlas Sound** AT-AA35
  AMPLIFIER MIX 3 CHANNEL INPUT (1x)
- ☐ **Atlas Sound** AT-AT10D
  10 WATT VOLUME CONTR WH IV PLT (6x)
- ☐ **Genesis** WG-11185009
  18/ 2 STR JKT 5C RL GRY (1x)
- ☐ **Bogen** BO-MBS1000A
  MICROPHONE DESK MOUNT (optional)

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for **House of Worship**

A simple to install, yet feature rich audio system designed for today's Houses of Worship. This is an ideal tool for Churches, Temples, or Monasteries to communicate easily. The multiple microphone solution allows the user to project their message from various locations while still offering room to expand. Powerful mixing and sound processing make this system sound as good as it looks! Speakers are available in white or black.

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **JBL** JF-C29AV1 (B or W)
  2-Way Single Speaker (2x)
- ☐ **JBL** JF-C28T60 (WHT or BLK) (need 4 total)
  100W Speaker Pair (4x)
- ☐ **JBL** JF-EON518S
  300W 18" Powered Subwoofer (1x)
- ☐ **Crown** 5C-CDI1000
  275W @ 8ohm Lightweight Power Amp (1x)
- ☐ **Crown** 5C-28M
  8 ch. 2 out Rack Mount Preamp/Mixer (1x)
- ☐ **DBX** 9D-AFS224
  Automatic Feedback Suppressor (1x)
- ☐ **Shure** SB-BLX1485H8
  Shure Wireless Lapel Kit
- ☐ **Shure** SB-SM58S
  SM58 Cardioid Dynamic Microphone (1x)
- ☐ **Shure** SB-A25D
  Microphone Clip (1x)
- ☐ **Shure** SB-MX418C
  Gooseneck Mini Condensor Mic (1x)
- ☐ **Omnimount** 3O-RE18
  18-Space Rack Mount Enclosure (1x)
- ☐ **Middle Atlantic** NO-PD915R
  15 Amp Rack Mount 9-Outlet Power Strip (1x)
- ☐ **Atlas Sound** AT-MS10CE
  Microphone Stand (1x)
- ☐ **Pro Co Sound** PO-WP1013
  Dual XLR Gang Plate (1x)
- ☐ **Pro Co Sound** PO-CCWP1004
  Female XLR Gang Plate (3x)
- ☐ **Pro Co Sound** PO-SMM25
  Pro-Co 25 ft. XLR Cable
- ☐ **Pro Co Sound** PO-SMM10
  Pro-Co 10 ft. XLR Cable
- ☐ **Pro Co Sound** PO-SMM5
  Pro-Co 5 ft. XLR Cable
- ☐ **Genesis** WG-12145509
  500 ft. Box Bare Control Cable (1x)
- ☐ **Genesis** WG-52505501
  500 ft. Box Bare Audio Cable (1x)

YOUR BUSINESS DESERVES MORE

More Support

Sample System Design for
Gas Stations & Convenience Stores

This easy to install system provides background sound reinforcement with paging capability. It uses 6 in-ceiling and 4 outdoor speakers, a central amplifier and includes a paging microphone. The volume levels can be split into 2 areas (indoor/outdoor) with the supplied volume controls.

Contact our Systems Sales & Support Team at **1-800-234-7971**
to customize your system and provide complete systems integration support.

Shopping List

- ☐ **Atlas Sound** AT-SD72W
  15w High Performance Loudspeaker (6x)
- ☐ **Atlas Sound** AT-EZ958
  Ceiling Speaker Baffle & Mounting Kit (6x)
- ☐ **Atlas Sound** AT-SM52TWPR
  SM Series 100w Loudspeakers (2x pairs)
- ☐ **Atlas Sound** AT-AT100
  100w Stainless Steel Volume Control (1x)
- ☐ **Atlas Sound** AT-AT35
  35w Indoor Volume Control (1x)
- ☐ **Atlas Sound** AT-AA120
  120w 6 Channel Mixer/Amplifier (1x)
- ☐ **Honeywell Genesis** WG-52505501
  500 ft. Bare Sound Wire (1x)
- ☐ **Bogen** BO-MBS1000A
  Desktop push-to-talk microphone (1x)

Strategy Series® Amplifiers

- Atlas Sound continues to expand on its line of Strategy Series® amplifiers and all models of mixer and power amplifiers are available to address the needs of the commercial sound industry. All are designed from the ground up with long term reliability in mind, and they have extensive feature sets, compact designs, and a multitude of accessories for virtually any system's specific requirements.t
- Mixer amplifiers in the AA and MA series feature as many as 6 mic/line inputs for BGM, paging, speech privacy, music on hold, and any other multiple source applications. Models range in output power from 35 to 240W into 8 Ohm/70.7V/100V. The MA amplifiers feature variable mute sensitivity control, available phantom power, removable level controls with included security cover, contact closure mute terminals, and a global (100VAC-240VAC) power supply. Common features in the AA series include dual line outputs, pre out/power in patch, remote and VOX activated mute function, low cut filter, and MOH out
- Power amplifiers like PA and CP series models output up to 700W of true power into 8 Ohm/70.7V/100V speaker loads. CP amplifiers are built with esoteric grade toroidal power supply and output transformers for their outstanding reliability as well as extended frequency response (-3dB @ 30Hz - 70.7V output). The flexible PA series features a wide variety of power amplifiers that includes 70.7/100V models with global power supplies and available output power of 40W, 60W, and 100W. An 8 Ohm, 2-channel system is also available for small to mid sound reinforcement systems.
- The amplifiers in the Strategy Series complement the full line of Atlas Sound loudspeaker systems to meet the needs of your commercial sound installations

AT-AA120 (AA120)
AT-AA120M (AA120M)
AT-AA240 (AA240)
AT-AA35 (AA35)
AT-MA40G (MA40G)
AT-MA60G (MA60G)
AT-PA40G (PA40G)
AT-PA60G (PA60G)
AT-PA702 (PA702)
AT-PA1001G (PA1001G)
AT-CP400 (CP400)
AT-CP700 (CP700)

Atlas Sound FAP In-Ceiling Speakers

- The industry's most popular 70.7V/100V/8 Ohm coaxial ceiling speaker package delivering true, high fidelity sound reproduction in an attractive and easy-to-install system
- Tuned and ported enclosures, built-in transformer/front mount tap selector, and drop-tile mounting hardware
- Available in 4", 6", 8", and sub configurations. Contact ADI for full details.

AT-FAP42TPR (FAP42T)

AT-FAP82TPR (FAP82T)

Atlas Sound SM Surface Mount Speakers

- Atlas Sound Surface Mount loudspeaker systems are ideal for monaural and stereo foreground and background music or video systems, indoors and out
- Constructed of weather resistant materials including UV-resistant, polypropylene injected molded cabinets, powered coated aluminum grilles, all brass hardware, etc.
- Mounting brackets included
- -B for Black, -W for White

AT-SM42TB (SM42T*)

AT-SM52TB (SM52T*)

AT-SM82TB (SM82T*)

Atlas SD Speaker Package

- Quality 5 Watt dual voltage transformer
- Choose speaker/transformer only or complete assembly. 10 oz. dual cone speaker
- With attractive CRS white powder coat baffle

AT-SD72W (SD72W)

AT-SD72WV (SD72WV)

Plena Easy Series - 70V Background Music (BGM) System with All-Call Paging

- Provides wide area voice announcements to all inside and outside areas. Music/Commercial content provided for callers on hold only.
- Provides background music to all areas (commercial content can be added for retail stores)
- Uses telephone handset for point-to-point intercom

UF-PLE1ME120 (PLE-1ME120-US)

- 120 Watt eco mixer amplifier

UF-PLESDT (PLE-SDT)

- Plena Easy line USB/SD MP3 player and FM tuner functions

UF-LM2BB (LM2-BB)

- Back dome

UF-LM2TB (LM2-TB)

- Tile bridge

High Power Commercial Amplifier

- I500 Watt/channel 70V and/or 8 Ohm commercial amplifier
- Rated for 2, 4, 8 Ohm loads & 70V/100V and 140V outputs

5C-CDI1000 (CDI 1000)

8 Channel Audio Amplifier

- 8 x 125W Audio Amplifier Powered by DriveCore Technology
- Convection Cooled
- Remote Power Control Capability
- Auto-Standby for increased energy efficiency
- 1.75"H x 19"W x 14.25"D

5C-CT8150 (CT8150)

crown by HARMAN

Crown's Commercial Audio Series

- Crown's Commercial Audio Series delivers legendary Crown quality to the commercial audio industry. These low-cost units provide all necessary features in a simple building-block format, making it easy to upgrade your sound system as a facility expands.
- Designed for maximum flexibility, and easily configured for a range of uses such as paging, background music, security, and evacuation instructions, Crown's Commercial Audio Series is the smart choice for commercial sound.
- Amplifier Models - highly flexible and expandable, Crown's Mixer Amplifiers offer an affordable solution for commercial audio applications

Amplifiers

5C-180A (180A)
- 1-Channel 80W (4 Ohm & 70V) Amplifier for single zone applications

5C-280A (280A)
- 2-Channel 80W (4 Ohm & 70V) Amplifier for dual zone applications

5C-1160A (1160A)
- 1-Channel 160W (4 Ohm & 70V) Amplifier for single zone applications

Mixers

- Crown's mixer series offer highly flexible solutions for commercial audio applications
- 14M - 4 inputs and 1 output pre-amplifier/mixer

5C-14M (14M)
- 28M – 8 inputs and 2 output pre-amplifier/mixer

5C-28M (28M)

Mixer-Amplifiers

- Provides Crown's legendary audio quality with flexible and expandable configurations. Features include priority muting and flexible output configuration with priority muting.

5C-135MA (135MA)
- 3 input 1-35 Watt (8 Ohm & 70V/100V) output for single zone applications

5C-160MA (160MA)
- 4 input 1-60 Watt (4 Ohm & 70V) output for single zone applications

5C-180MA (180MA)
- 4 inputs with (1) 80 Watt output channel

GET IT NOW!

5C-280MA (280MA)
- 8 input 2-80 Watt (4 Ohm & 70V) output for dual zone applications

5C-1160MA (1160MA)
- 4 input 1-80 Watt (4 Ohm & 70V) output for single zone applications

dbx ZonePro 640

- Signal processing & routing for background music applications
- 6 inputs & 4 outputs with on board DSP processing
- GUI and configuration wizard for easy set up
- RS232 and Ethernet control
- Available (ZC) wall panel controls

9D-JDBX640 (ZonePro 640)

dbx ZonePro 1260

- Signal processing & routing for background music applications
- 12 inputs & 6 outputs with on board DSP processing
- GUI and configuration wizard for easy set up
- RS232 and Ethernet control with addressable IP function
- Available (ZC) wall panel controls

9D-JDBX1260 (ZonePro 1260)

Impedance Meter/Calculated Watts

- Measures impedance for distributed sound or 8 Ohm systems
- Impedenace measured at 100, 330, 1K and 10kHz
- Extremely accurate digital readout

GO-ZM1 (ZM1)

- With overload protection to prevent damage from amplifier output

GO-ZM1P (ZM1P)

1-Zone Public Address Mixer

- 2 stereo inputs, 1 mic input, 1 priority line input
- 1 stereo output with dedicated subwoofer output
- Quick & simple configuration via front/rear panel controls
- Optional CSR remotes and CSPM paging microphones

JF-CSM21 (CSM-21)

2-Zone Public Address Mixer

- 3 stereo inputs, 1 mic input, 1 priority line input
- 2 stereo outputs with dedicated subwoofer output
- Quick & simple configuration via front/rear panel controls
- Optional CSR remotes and CSPM paging microphones

JF-CSM32 (CSM-32)

2 x 120W Audio Amplifier

- 1/2 rack unit wide by 1 rack unit tall
- Convection cooled
- Includes rack/wall mounting kit
- Summing RCA inputs per channel

JF-CSA2120 (CSA-2120)

Transformer Kit

- 2 channels kit for constant voltage operation
- 70V/100V outputs
- Rack-mountable with CSA-2120 amplifier
- Includes wiring kit to work with CSA-2120

JF-CST2120 (CST-2120)

Commercial Mixer/Amplifiers (CSMA)

- CSMA-240/280/2120 include 8 inputs with 2 outputs of 40, 80 or 120 watts of power
- CSMA-180/1120 include 4 inputs with 1 output of 80 or 120 watts of power
- ENERGY STAR® certified; ideal for commercial and industrial use
- Fanless, space-saving 1U design
- Independent bass and treble controls for each output channel
- Supports 70V and 100V distributed audio systems without the need for separate transformer
- Remote volume control capability using JBL CSR-V module and standard Ethernet cable
- Priority muting & configurable output routing
- Utilizes Crown's DriveCore™ technology providing excellent audio performance and high efficiency

JF-CSMA180 (CSMA180)
JF-CSMA1120 (CSMA1120)
JF-CSMA240 (CSMA240)
JF-CSMA280 (CSMA280)
JF-CSMA2120 (CSMA2120)

Commercial Mixers (CSM)

- 4 or 8 inputs with 1 or 2 channel outputs
- Fanless, space-saving 1U design
- Configurable output routing (2 channel models only)
- Independent bass/treble controls
- Euro-block type mic/line input and output connectors, and unbalanced RCA inputs for consumer connection
- Supports JBL CSR-V wall controller via Ethernet cable
- Priority muting, VOX ducking, and phantom power for all models

JF-NCSM14UUS (CSM-14)
JF-NCSM28UUS (CSM-28)

Commercial Amplifiers (CSA)

- 1 or 2 output channels with 40W, 80W, 120W per channel
- Built-in 70V and 100V
- Fanless, space-saving 1U design
- Sleep mode disable function
- ENERGY STAR® certified
- Utilizes Crown's DriveCore™ technology
- Supports the JBL CSR-V wall controller via Ethernet cable

JF-NCSA140ZU (CSA140Z)
JF-NCSA180ZU (CSAZ)
JF-NCSA1120Z (CSA1120Z)
JF-NCSA240ZU (CSA240Z)
JF-NCSA280ZU (CSA280Z)
JF-NCSA2120Z (CSA2120Z)

Control 12C/T Compact Full-Range Ceiling Speaker with 3" (76 mm) Driver

- Wide bandwidth 68 Hz – 17 kHz, 20 Watts (8Ω direct) plus 15 W multi-tap transformer for 70V/100V distributed systems.
- Wide 130° coverage in an easy-to-install all-in-one blind-mount ceiling speaker, complete with installation accessories
- Available in white or black, paintable, cost-effective pricing

JF-C12CT (Control 12C/T)

JF-C12CTBK (Control 12C/T-BK)

Control 14C/T Ceiling Speaker with 4" High Output Co-Axial Driver

- Wide bandwidth 74 Hz – 20 kHz performance, 30 Watts (8Ω direct) plus 25 W multi-tap transformer for 70V/100V distributed systems. High sensitivity, available in white or black, paintable, cost-effective pricing.
- Wide 120° coverage in an easy-to-install all-in-one ceiling blind-mount speaker, complete with installation accessories

JF-C14CT (Control 14C/T)

JF-C14CTBK (Control 14C/T-BK)

Control 16C/T Ceiling Speaker with 6-1/2" High Output Co-Axial Driver

- Wide bandwidth 62 Hz – 20 kHz performance, 50 Watts (8Ω direct) plus 30 W multi-tap transformer for 70V/100V distributed systems
- 110° coverage in an easy-to-install all-in-one blind-mount ceiling speaker, complete with installation accessories
- High 91 dB sensitivity for high output with less amplifier power. Available in white or black.

JF-C16CT (Control 16C/T)

JF-C16CTBK (Control 16C/T-BK)

JBL Professional 4" Ceiling Speaker

- 4" ceiling speaker with punched metal grille
- 5W, 70V speaker for commercial distributed speaker systems. Wide 170° coverage.
- Install with JF-CSSBB4x6 pre-install backcan

JF-CSS8004 (CSS8004)

JBL Professional 8" In-Ceiling Speaker

- 5W, 70V speaker for commercial distributed speaker systems. Wide 120° coverage; high 96 dB sensitivity. 8" in-ceiling speaker.
- Install with JF-CSSBB8x6 pre-install backcan

JF-CSS8008 (CSS8008)

JBL Professional Two-Way Speaker

- 60W, 70V speaker for commercial distributed systems. 6" two-way ceiling speaker.
- Complete with grille, metal backcan, tile rails
- 75Hz to 20kHz, UL1480/2043

JF-C26CTWH (Control26CT)

JBL Professional Speakers and Subwoofers

Compact Surface-Mount (On-Wall) Loudspeakers

JF-C23BLK (Control 23 & -WH)

JF-C23WHT
- 3-1/2" 2-way, 8Ω

JF-C25BLK (Control 25 & WH)
- 5-1/2" 2-way, 8Ω

JF-C25TBLK (Control 25T & -WH)
- 30W/70V

High Output Surface-Mount Loudspeakers

JF-C28BLK (Control 28 & -WH)

JF-C28WHT
- 8" 2-way, 8Ω

JF-C28T60BLK (Control 28T-60 & -WH)
- 60W/70V

JF-C30WHT

JF-C30BLK (Control 30 & -WH)
- 10" 3-way, 8Ω & 150W/70V

Low-Depth Ceiling Loudspeakers

JF-C24CM (Control 24C Micro)
- 4" 2-way, 8Ω

JF-C24CTM (24CT Micro)
- 8W/70V

JF-C24CTMP (24CT MicroPlus)
- 25W/70V

Premium In-Ceiling Loudspeakers

JF-C24CT (Control 24CT)
- 30W/70V

Pendant Loudspeakers
- Suspension cables included

JF-C65PTWH (C65P/T & -WH)
- Compact full-range, 8Ω and 70V

JF-C62P (C62P & -WH)
- Mid-high satellite pendant

Open-Back Ceiling Speakers
- For non-plenum ceilings, packs of 4 pieces

JF-8124 (8124)
- 4" 6W/70V

JF-8128 (8128)
- 8" 6W/70V



Subwoofers

JF-C19CSTWHT (Control 19CST)
- 75W/70V

JF-CNTRLSB2 (Control SB-2)
- Stereo, 10" indoor

CSS-H Paging Horns

- Excellent voice range clarity for announcements and paging.
- Combined 70V/100V and 8 ohm
- UL transformer, high sensitivity, high-pass protection, stainless steel bracket
- CSS-H15 is 15 Watts; CSS-H30 is 30 Watts

JF-CSSH15 (CSS-H15)

JF-CSSH30 (CSS-H30)

450 Series II Voice Communication Microphone

- Omnidirectional vocal microphone. Designed for indoor communication systems — fixed station — including police, fire, transportation, restaurant, and industrial applications.
- Intercom
- Two-Way Radio

SB-450SERIE2 (450SERIESII)

Paging Voice Communication Microphone

- Designed for communication systems — mobile and fixed station — including police, fire, utilities, transportation, commercial, and industrial applications. Perfect intercom and two-way paging applications. Does not require DC power.

SB-527B (527B)

515 Series Vocal Communication Microphone

- Gooseneck-mounted cardioid dynamic microphone. Designed for communication systems including transportation, restaurant, commercial and industrial applications.
- Intercom
- Paging
- Announcement

SB-515SBG18X (515SBG-18X)

Stereo Microphone Mixer

- Many smaller installations require an easy-to-use mixer with very specific features and capabilities. The SCM262 provides features tailor-made for your smaller application, such as defeatable "ducking", "jukebox mute", and "12V Phantom". Perfect for restaurants, classrooms and corporate board rooms.

SB-SCM262 (SCM262)

1000mA (1 Amp) 12VDC Power Supply

- UL Listed

SO-PSW5 (PSW5)

speco technologies

30 Watt RMS Public Address Amplifier

- Two mic inputs (terminal strip) and one stereo RCA Aux input
- Front panel level, bass and treble controls
- 4/8/16 Ohms and 70/25V speaker outputs
- Telephone paging input and music on hold feature

SO-PBM30 (PBM30)

speco technologies

120W RMS P.A. Amplifier

- RMS Power: 120W, Max. Power: 240W
- 3 XLR Microphone and 3 stereo RCA auxiliary inputs
- 5 zoned 70/25V speaker outputs and one non-zoned 4/8/16 Ohms speaker output
- Includes remote control and rack mount accessories

SO-PBM120A (PBM120A)

speco technologies

Four Zone 160 Watt Matrix Amplifer

- Simultaneous playback of up to 5 sources into up to 4 zones
- 40W RMS 70/25V speaker power output per zone
- Separate controls (gain, bass, treble, volume) and mute for each source
- Separate volume control & LED level indication

SO-PL200M (PL200M)

speco technologies

15W PA Mixer Amplifier

- RMS Power: 15W, Max. Power: 30W
- Outputs: 4 & 8 Ohms, 70/25V
- Microphone Inputs: 2 (One ¼" and one ¼" or XLR)
- Auxiliary Inputs: 1 (One ¼")

SO-PVL15A (PVL15A)

speco technologies

Adjustable Gooseneck Tabletop Microphone

- Momentary switch for priority paging & lock down switch for continuous use
- Impedance: low - 600 Ohms high- 50kHz
- Sensitivity: high - 53dB±3dB low - 71dB±3dB
- 6" gooseneck extension and 5' cord

SO-MHL5S (MHL5S)